





DELOS


- Inground solution.
- IK rate: 07

Exterior Inground, Recessed & Surface 



Code	Model	Light Source	Colour*	Power Consumption	Input Voltage		IP 
LGR.115	DELOS 10W	1x10W	WARM WHITE	13W	240VAC	24°	IP67

* Other CCT available upon request

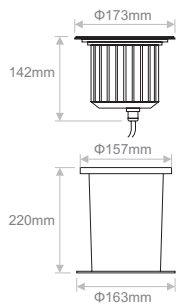

- LED round luminaire for architectural applications.
- Outdoor installation: IP67.
- IK Rate: 07
- Dimmable.




LIGHTSOURCE BY
OSRAM

Code	Type*	No.LED	Colour	Typical Luminance	Watt	Dimensions	Diameter	Max. Kg	Voltage	Beam**	IP
LGR.074	Round	6	COOL WHITE	956 lm	13.5W	173x77mm	173mm	150Kg	24VDC	20°	IP67
LGR.075	Round	6	WARM WHITE	783 lm	13.5W	173x77mm	173mm	150Kg	24VDC	20°	IP67

*Available in square face upon request.

**Available in 9°, 13° and 30° upon request.

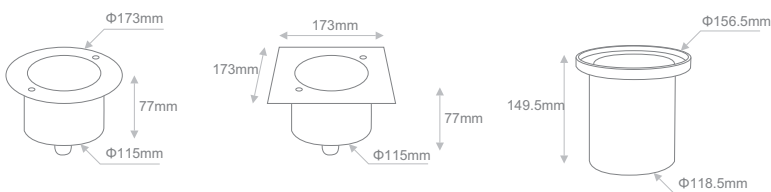



DOKOS

Exterior Inground, Recessed & Surface 


- Inground LED luminaire
- 1800kg maximum weight.
- Osram LED.
- IK rate: 09
- Dimmable



LIGHTSOURCE BY
OSRAM

Code	Model*	No.LED	Colour	Watt	Lumens	Lumen Efficacy	Diameter	Voltage		IP 
LGR.086	DOKOS ROUND	3	COOL WHITE	6W	475lm	79lm/W	116mm	24VDC	20°	IP65
LGR.087	DOKOS ROUND	3	WARM WHITE	6W	375lm	63lm/W	116mm	24VDC	20°	IP65
LGR.106	DOKOS ROUND	3	COOL WHITE	6W	475lm	79lm/W	116mm	24VDC	35°x45°	IP65
LGR.105	DOKOS ROUND	3	WARM WHITE	6W	375lm	63lm/W	116mm	24VDC	35°x45°	IP65

* Available in square upon request

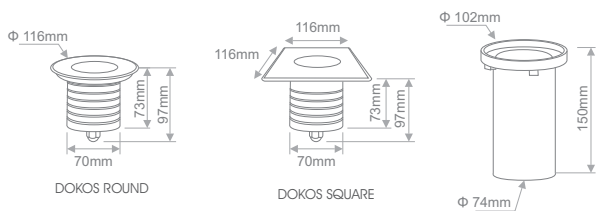




Exterior Inground, Recessed & Surface

HYDRA

- IK rate: 08
- 316 stainless steel, clear glass, plastic box.
- Dimmable

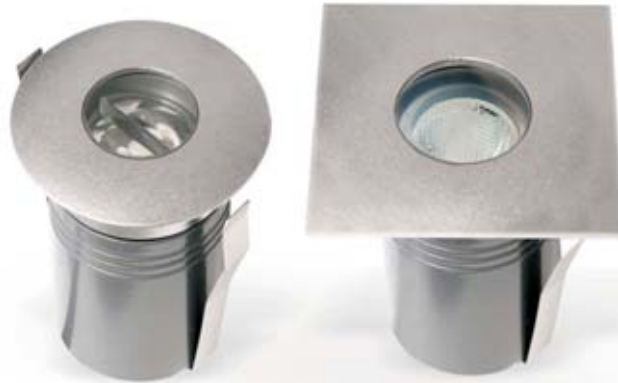

LIGHTSOURCE BY
OSRAM

Code	Type*	No.LED	Colour	CRI	Lumen	Watt	Dimensions	Diameter	Voltage	Beam**	IP
------	-------	--------	--------	-----	-------	------	------------	----------	---------	--------	----

RGB

LGR.114 /CA	Round	1	RGB	-	56lm	3.5W	Φ55x78mm	55mm	24VDC	30°	IP67
--------------------	-------	---	-----	---	------	------	----------	------	-------	-----	------

*Available in square face upon request.

Monochromatic

LGR.084	Round	1	COOL WHITE	80	120lm	2.6W	Φ55x78mm	55mm	24VDC	50°x35°	IP67
LGR.116	Round	1	COOL WHITE	80	130lm	2.6W	Φ55x78mm	55mm	24VDC	30°	IP67
LGR.085	Round	1	WARM WHITE	80	102lm	2.6W	Φ55x78mm	55mm	24VDC	50°x35°	IP67

LGR.103	Square	1	WARM WHITE	80	110lm	2.6W	55x55x78mm	-	24VDC	30°	IP67
----------------	--------	---	------------	----	-------	------	------------	---	-------	-----	------

*Available in round or square face upon request.
**Available in 15°, 20°, 30°, 45° upon request.

