

DENDO

- Spotlight with manually adjustable beam angle from 60° to 10°
- Housing: passivated aluminum
- Power cable: H05RN-F 2x0.75mm² open wires L=1.5m
- Consumption: 12watt
- Outdoor installation IP67
- Plastic spike available



Selectable beam angle
(From 60° to 10°)



Model	Watt	Colour Temperature*	Luminaire Lumen	Colour Rendering	Beam Angle	Colour	Voltage
DENDO	12W	3000K	500lm (60°) to 200lm (10°)	>80	Adjustable	Dark Grey	24VDC

*Available in 4000K & 6000K upon request.






TALURE

RGB: Management through:

- DMX 512 controllers.
- Wireless IR & RF control units.
- DALI Protocol devices.
- Spotlight with hood as accessory
- Housing: Die-cast powder coated aluminum
- Mounting base: Powder coated die-cast aluminum
- Glass : Tempered glass, T=4mm
- Cable gland: IP67 PG-9 cooper with nickel coated
- Power cable : H05RN-F 2x1.0mm² L=2.0m
- IK Rate: 05
- PVC spike available as extra
- Outdoor installation: IP65
- Luminaire colour: Black



Code	No.LED	Colour*	Watt	Dimensions	Voltage		IP 	Dimmable
ALE.049 /CA	5	RGB	15W	125x225x133mm	24VDC	30°	IP65	Dimmable

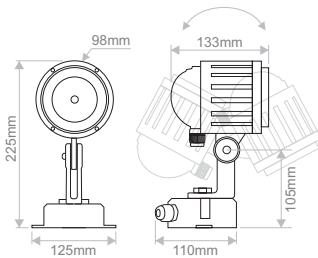

ACC.206
Top hat supplied as extra



- Spotlight with hood as accessory
- High efficiency deep reflector with clear cover glass
- Housing: Die-cast powder coated aluminum
- Mounting base: Powder coated die-cast aluminum
- Glass : Tempered glass, T=4mm
- Cable gland: IP-68 PG-9 PVC
- Power cable : H05RN-F 2x1.0mm²=2.0m
- IK Rate: 05
- PVC spike available as extra
- Outdoor installation: IP65
- Dimmable
- Luminaire colour: Black




Lightsources by
bridgelux.

Model	Colour Temperature	LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Voltage
KEA B 9.2W (KEA B 09)	(27B0895)	2700K - 895lm	(AD) Adjustable	(80) 80*	(25) 25°	(BL) Black	(24) 24VDC
	(30B0945)	3000K - 945lm					
	(35B0972)	3500K - 972lm					
	(40B1006)	4000K - 1006lm					
	(50B1009)	5000K - 1009lm					

*CRI 90 available upon request in different lumen outputs

Ordering Code Example:
KEA B 09 - 30B0945 - AD - 80 - 25 - BL - 24

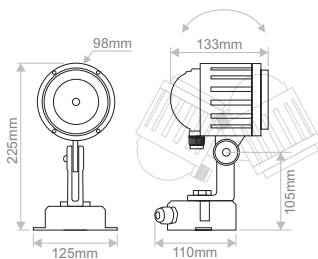

ACC.206
Top Hat supplied as extra



OCTAN

- Neoprene cable HO5RN-F 1.0m.
- Aluminum housing and front cover.
- Electrostatic painting alu colour.
- Dimmable.
- 2-3 SDCM
- L70/B50 50.000h
- IP65



Brown Colour

LIGHTSOURCE BY
bridgelux

Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour***	Voltage
OCTAN 6.4W (OCTAN 06)	(27B0505) 2700K - 505lm	(AD) Adjustable	(70) 70*	(16) 16°	(GR) Grey	(24) 24VDC
	(30B0550) 3000K - 550lm		(80) 80	(28) 28°		
	(40B0590) 4000K - 590lm		(90) 90**	(40) 40°		
	(56B0685) 5600K - 685lm					


* 5600K only available in CRI 70
** CRI 90 only for 2700K & 3000K
***Brown colour available upon request
****Spike available upon request as extra

LIGHTSOURCE BY
LUMINUS


Model	Colour Temperature* - LED Lumen	Type	Colour Rendering	Beam Angle**	Colour***	Voltage
OCTAN 23W (OCTAN 23)	(30L1770) 3000K - 1770lm	(AD) Adjustable	(80) 80	(15) 15°	(GR) Grey	(24) 24VDC

* Other CCT available upon request
** Available in 22° upon request
***Brown colour available upon request
****Spike available upon request as extra

OCTAN 06

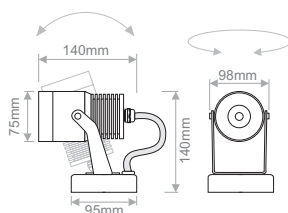

OCTAN 23

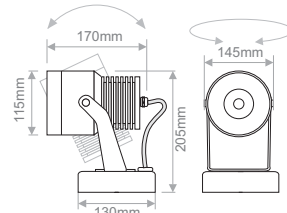

Ordering Code Example:
OCTAN 06 - 30B0550 - AD - 80 - 28 - GR - 24




ACC.152
Earth rack / spike

- Housing: Die-cast powder coated aluminium
- Mounting base: Die-cast powder coated aluminium
- Glass : Tempered glass. T=4mm
- Cable gland: Copper and nickel coated
- Power cable : H05RN-F 2x1.0mm² L=2.0m
- Outdoor installation: IP66
- Tinos spike material: PVC
- Tinos pole material: Die-cast powder coated aluminium
- IK Rate: 07
- Non dimmable
- Luminaire colour: Dark grey



LIGHTSOURCE BY
SHARP

Code	Model	No.LED	Colour*	Watt	Lumen	Voltage	Colour of fitting**	Beam angle	IP
<i>Tinos Pole</i>									
ALE.060	Tinos Pole	1	WARM WHITE	10W	696lm	24VDC	Dark Grey	30°	IP65
*Available in Cool White (761lm) upon request. **Black housing available upon request.									
<i>Tinos Spike</i>									
ALE.062	Tinos Spike	1	WARM WHITE	10W	696lm	24VDC	Dark Grey	30°	IP65
*Available in Cool White (761lm) upon request. **Black housing available upon request.									
<i>Tinos Base</i>									
ALE.061	Tinos Base	1	WARM WHITE	10W	696lm	24VDC	Dark Grey	30°	IP65
*Available in Cool White (761lm) upon request. **Black housing available upon request.									

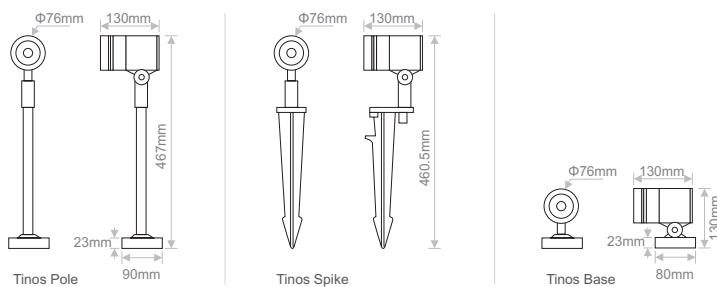

TONDO + TONDO MINI

- Housing: passivated aluminum
- Glass : Tempered glass T=4mm
- Power cable Tondo: H05RN-F 2x0.75mm² L=1.5m
- Power cable Tondo Mini: H05RN-F 0.75mm² L=0.6m
- Plastic spike available (aluminium spike also available upon request)
- Outdoor installation IP67
- Luminaire also available in black colour upon request



CREE
LEDs

Tondo

Code	Model	No.LED	Colour*	Watt	Lumen	Dimensions	Diameter	Voltage	Beam**	IP	Dimmable
ALE.051	Tondo	4	COOL WHITE	6W	370lm	58x82x62mm	46mm	24VDC	25°	IP65	Non-Dimmable
ALE.052	Tondo	4	WARM WHITE	6W	320lm	58x82x62mm	46mm	12VDC	25°	IP65	Dimmable

*Other colours available upon request

**Available in 40° & 60° degrees upon request.



Tondo Mini


Code	Model	No.LED	Colour*	Watt	Lumen	Dimensions	Diameter	Voltage	Beam**	IP	Dimmable
ALE.053	Tondo Mini	1	COOL WHITE	2W	130lm	38x68x52mm	28mm	12VDC	20°	IP65	Dimmable
ALE.054	Tondo Mini	1	WARM WHITE	2W	110lm	38x68x52mm	28mm	12VDC	20°	IP65	Dimmable
ALE.069	Tondo Mini	1	NEUTRAL WHITE	2W	120lm	38x68x52mm	28mm	12VDC	20°	IP65	Dimmable

*Other colours available upon request



**Available in 40° & 60° degrees upon request.



Tondo

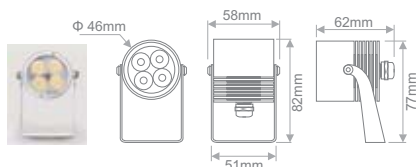

Tondo Mini

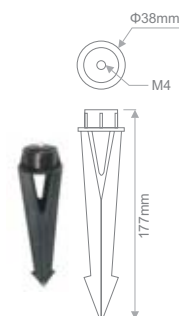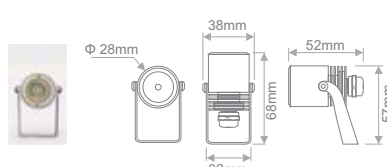

RGB: Management through:

- DMX 512 controllers.
- Wireless IR & RF control units.
- DALI Protocol devices.

- Housing: Aluminum anodized finish (powder painted)
- Glass : Tempered glass. T=3mm
- Cable gland: Copper and nickel coated
- Power cable : H05RN-F 2x1.0mm²=2.0m
- Outdoor installation: IP66
- Plastic spike available
- IK Rate: 02
- PWM Dimmable





LIGHTSOURCE BY
OSRAM

Code	Model	No.LED	Colour	Watt	LED Lumen	Dimensions	Voltage	Beam Angle	IP	Dimmable
<i>RGB</i>										
ALE.040 /CA	Orion Base	1	RGB	3.5W	50lm	66x126mm	24VDC	30°	IP65	Dimmable
<i>MONOCHROMATIC</i>										
ALE.038	Orion Base	1	COOL WHITE	2.6W	145lm	66x126mm	24VDC	30°	IP65	Dimmable
ALE.039	Orion Base	1	WARM WHITE	2.6W	120lm	66x126mm	24VDC	30°	IP65	Dimmable

* Available in 15°, 20° and 45° for CW and WW upon request.

Code	Model	No.LED	Colour	Watt	LED Lumen	Dimensions	Voltage	Beam Angle	IP	Dimmable
<i>RGB</i>										
ALE.043 /CA	Orion Spike	1	RGB	3.5W	50lm	66x320mm	24VDC	30°	IP65	Dimmable
<i>MONOCHROMATIC</i>										
ALE.041	Orion Spike	1	COOL WHITE	2.6W	145lm	66x320mm	24VDC	30°	IP65	Dimmable
ALE.042	Orion Spike	1	WARM WHITE	2.6W	120lm	66x320mm	24VDC	30°	IP65	Dimmable

* Available in 15°, 20° and 45° for CW and WW upon request.

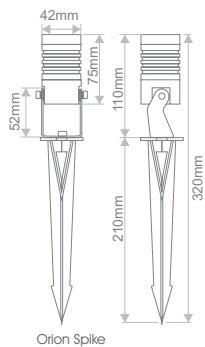

ACC.007
SPIKE/ EARTH RACK