

MIDI U IP67

Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- MIDI U Linear LED ideal for outdoor installations.
- Supplied with single waterproof cable & connector as standard.
- Possibility for in-out cables & connectors upon request as extra.
- L70 50,000h
- IP67




LIGHTSOURCE BY **NICHIA**

Model	Luminaire Colour	Colour Temperature	Type	Watt / Length	Voltage
MIDI U (MIDI U)	(AN) Anodized	(WW) Warm White	(NC) No Cover	(07W035) 7W / 35cm	24VDC (24)
		(NW) Neutral White		(12W060) 12.2W / 60cm	
		(CW) Cool White		(17W085) 17.5W / 85cm	
		(21W102) 21W / 102cm			
		(24W119) 24.5W / 119cm			
		(31W152) 31.5W / 152cm			
		(42W202) 42W / 202cm			

Ordering Code Example:
MIDI U - AN - CW - NC - 12W060 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

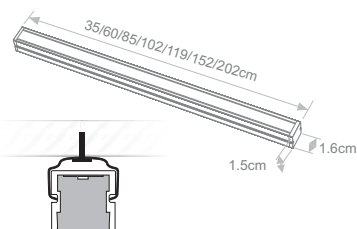

Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- MIDI U Linear LED ideal for outdoor installations.
- Supplied with single waterproof cable & connector as standard.
- Possibility for in-out cables & connectors upon request as extra.
- L70 50,000h
- IP67



One outdoor cable and IP connector (as standard)



Model	Luminaire Colour	Colour Temperature	Type	Watt / Length	Voltage
MIDI U (MIDI U)	(AN) Anodized	(WW) Warm White	(ML) Milky	(07W035) 7W / 35cm	(24) 24VDC
				(12W060) 12.2W / 60cm	
				(17W085) 17.5W / 85cm	
				(21W102) 21W / 102cm	
				(24W119) 24.5W / 119cm	
				(31W152) 31.5W / 152cm	
				(42W202) 42W / 202cm	

Ordering Code Example:
MIDI U - AN - WW - ML - 12W060 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

