

TANDI RGBW


RGBW: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless RF control units.
- DALI Protocol devices.
- Ideal for illuminating big surfaces.
- Perfect for highlighting buildings with grand presence that stand out from their surroundings.
- RGBW 4 in 1 LED technology.
- Outdoor installation IP65.
- Housing: Extruded aluminium, powder coated.
- Glass: Tempered glass with thickness 3mm.
- Cable Gland: PVC IP-68 PG-11.
- Connection: 2 x HO5RN - F 5x0.5mm², 50cm input / output, with IP68 7 pin terminal connectors.



Code	No.LED	Colour	Watt	Lumen	Dimensions (LxWxH)	Voltage	Beam Angle	IP	IK Rate
ARL.068	12	RGBW	64W	1904lm	1025x85x73mm	24VDC	30°	IP65	05

*Available in 15° upon request.

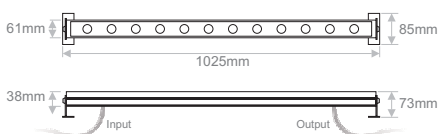

Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- L70 50.000h
- IP67



LIGHTSOURCE BY
NICHIA

Model*	No.LED	Colour*	Watt	Voltage	Beam Angle	IP
CANAL	84	2000K	21W/m	24VDC	120°	IP67
		2500K				
		2700K				
		3000K				
		4000K				
5700K						



ACC.085 Inox Holder

* Available in different lengths upon request.

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

