

ELECSYS IP67

RGB (RGBW)

Exterior Linear 

RGB: Management through:

- DMX 512 controllers.
- Wireless IR & RF control units.
- DALI Protocol devices.
- ELECSYS Linear LED ideal for outdoor installations.
- Supplied with single waterproof cable & connector as standard.
- Possibility for in-out cables & connectors upon request as extra.
- IP67



Model	Luminaire Colour	Colour*	Type	Watt / Length	Voltage
ELECSYS (ELECSYS)	(AN) Anodized	(RGB) RGB	(NC) No Cover	(07W033) 7.3W / 0.33m	(24) 24VDC /CA
				(13W058) 13.0W / 0.58m	
				(20W090) 20.5W / 0.90m	
				(27W121) 27.6W / 1.21m	
				(34W152) 34.5W / 1.52m	
				(46W202) 46.0W / 2.02m	


* Available in RGBW upon request

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

Ordering Code Example:

ELECSYS - AN - RGB - NC - 34W152 - 24

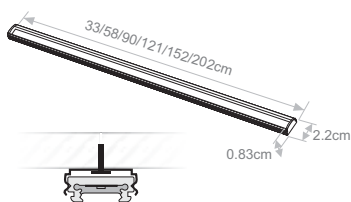

ELA.008
STAINLESS STEEL HOLDER
(Supplied as standard)



ACC.048
BRACKET
(Supplied as extra)

ELECSYS IP67

Monochromatic

Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- ELECSYS Linear LED ideal for outdoor installations.
- Supplied with single waterproof cable & connector as standard.
- Possibility for in-out cables & connectors upon request as extra.
- L70 50.000h
- IP67




LIGHTSOURCE BY
NICHIA

Model	Luminaire Colour	Colour Temperature	Type	Watt / Length	Voltage
ELECSYS (ELECSYS)	(AN) Anodized	(WW) Warm White	(NC) No Cover	(07W035) 7W / 35cm	24VDC (24)
		(NW) Neutral White		(12W060) 12.2W / 60cm	
		(CW) Cool White		(17W085) 17.5W / 85cm	
		(21W102) 21W / 102cm			
		(24W119) 24.5W / 119cm			
		(31W152) 31.5W / 152cm			
		(42W202) 42W / 202cm			

Ordering Code Example:
ELECSYS - AN - WW - NC - 31W152 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

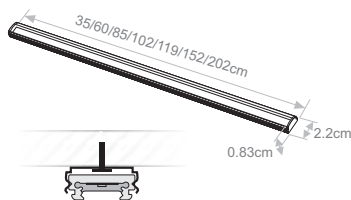

ELA.008
STAINLESS STEEL HOLDER
(Supplied as standard)



ACC.048
BRACKET
(Supplied as extra)