

RODITA

Interior Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- High purity aluminium.
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux


Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
RODITA 10.3W (RODITA 10)	(27B1365)	2700K - 1365lm	Adjustable	(80) 80	(40) 40°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1..10V) (DX) DMX (DL) DALI (PS) Push Switch (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1435)	3000K - 1435lm						
	(40B1479)	4000K - 1479lm						
	(57B1550)	5700K - 1550lm						
RODITA 30.7W (RODITA 31)	(27B4143)	2700K - 4143lm						
	(30B4335)	3000K - 4335lm						
	(40B4489)	4000K - 4489lm						
	(57B4704)	5700K - 4704lm						
RODITA 10.3W (RODITA 10)	(27B1138)	2700K - 1138lm						
	(30B1180)	3000K - 1180lm						
	(40B1265)	4000K - 1265lm						
RODITA 30.7W (RODITA 31)	(27B3452)	2700K - 3452lm						
	(30B3582)	3000K - 3582lm						
	(40B3841)	4000K - 3841lm						
RODITA 10.6W (RODITA 11)	(27B0973)	2700K - 973lm	(97) 97					
	(30B1038)	3000K - 1038lm						
RODITA 31.3W (RODITA 31)	(27B3048)	2700K - 3048lm						
	(30B3245)	3000K - 3245lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.


Ordering Code Example:

RODITA 31 - 40B3841 - AD - 90 - 40 - WH - DL - 00

RODITA 10W



RODITA 30W

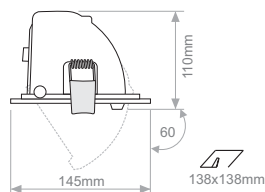



Interior Ceiling Recessed

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- High purity aluminium.
- 2-3 SDCM
- L70/B50 50.000h

SORENA



LIGHTSOURCE BY
bridgelux


Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories						
SORENA 15.2W (SORENA 15)	(27B2173)	2700K - 2173lm	(AD) Adjustable	(80) 80	(24) 24°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1..10V) (DX) DMX (DL) DALI (PS) Push Switch (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit						
	(30B2263)	3000K - 2263lm												
	(40B2354)	4000K - 2354lm												
	(57B2467)	5700K - 2467lm												
SORENA 30.7W (SORENA 31)	(27B4143)	2700K - 4143lm												
	(30B4335)	3000K - 4335lm												
	(40B4489)	4000K - 4489lm												
	(57B4704)	5700K - 4704lm												
SORENA 15.2W (SORENA 15)	(27B1811)	2700K - 1811lm							(90) 90	(97) 97	(24) 24°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1..10V) (DX) DMX (DL) DALI (PS) Push Switch (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1879)	3000K - 1879lm												
	(40B2015)	4000K - 2015lm												
SORENA 30.7W (SORENA 31)	(27B3452)	2700K - 3452lm												
	(30B3582)	3000K - 3582lm												
	(40B3841)	4000K - 3841lm												
SORENA 15.7W (SORENA 16)	(27B1506)	2700K - 1506lm												
	(30B1618)	3000K - 1618lm												
SORENA 31.3W (SORENA 31)	(27B3048)	2700K - 3048lm												
	(30B3245)	3000K - 3245lm												

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.


Ordering Code Example:

SORENA 31 - 40B3841 - AD - 90 - 24 - WH - DL - 00

SORENA 15W

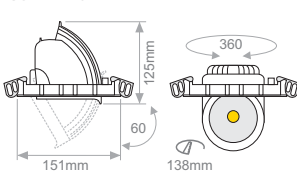

SORENA 30W

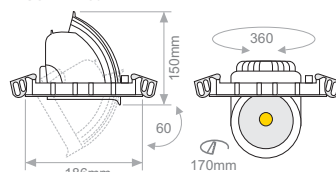

STAR

Interior Ceiling Recessed 

- Dimmable options.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
3000lm: **61W**

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
STAR (STAR)	(27) 2700K	(X3000) 3000lm	(FX) Fixed	(80) ≥ 80	(60) 60°	(WH) White (BL) Black	(00) Without Driver	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit
	(30) 3000K			(95) ≥ 95			(ND) Non-Dimmable	
	(35) 3500K			(DL) DALI				
	(40) 4000K			(WL) Wireless*				

* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
STAR - 27 - X3000 - FX - 95 - 60 - BL - A1 - 00

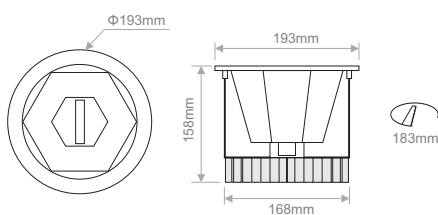



Interior Ceiling Recessed

DIAS ASSYMETRIC


- Asymmetric wall wash.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories					
DIAS 14.1W (DIAS 14)	[27B1763]	2700K - 1763lm	(FX) Fixed		(AS) Asymmetric Wash			COVER <input checked="" type="checkbox"/> Standard ↓ <input type="checkbox"/> XX EXTRAS <input type="checkbox"/> No Extras <input type="checkbox"/> Emergency Kit					
	[30B1854]	3000K - 1854lm											
	[40B1910]	4000K - 1910lm											
	[57B2002]	5700K - 2002lm											
DIAS 20.8W (DIAS 21)	[27B2800]	2700K - 2800lm											
	[30B2917]	3000K - 2917lm											
	[40B3034]	4000K - 3034lm											
	[57B3180]	5700K - 3180lm											
DIAS 14.1W (DIAS 14)	[27B1469]	2700K - 1469lm							(90) 90			[AL] Alluminium [WH] White [BL] Black [GR] Grey	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **
	[30B1524]	3000K - 1524lm											
	[40B1634]	4000K - 1634lm											
DIAS 20.8W (DIAS 21)	[27B2333]	2700K - 2333lm											
	[30B2421]	3000K - 2421lm											
	[40B2597]	4000K - 2597lm											
DIAS 14.5W (DIAS 15)	[27B1268]	2700K - 1268lm	(97) 97										
	[30B1353]	3000K - 1353lm											
DIAS 21.4W (DIAS 21)	[27B1967]	2700K - 1967lm											
	[30B2114]	3000K - 2114lm											

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

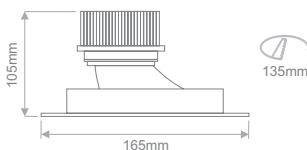

Ordering Code Example:
DIAS 21 - 40B2597 - FX - 90 - AS - WH - DL - 00

ZETA X

Interior Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
 1300lm: **11.7W**
 2000lm: **19.5W**
 3000lm: **29.3W**
 4000lm: **39.1W**
 5000lm: **46.8W**

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
ZETA (ZETA)	(27) 2700K (30) 3000K (35) 3500K (40) 4000K	(X1300) 1300lm	(FX) Fixed	(83) 83	(14) 14° (25) 25° (39) 39°	(WH) White (BL) Black	(00) Without Driver	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (0) No Extras (X1) Emergency Kit
		(X2000) 2000lm					(ND) Non-Dimmable	
		(X3000) 3000lm					(A1) Analogue (1-10V)	
		(X4000) 4000lm					(DX) DMX	
		(X5000) 5000lm					(DL) DALI	
							(WL) Wireless**	
	(X1300) 1300lm (X2000) 2000lm (X3000) 3000lm	(97) 97						

* Vibrant V80 for CRI83 available in 3000K,
 Vibrant V95 for CRI97 available in 3000K,
 Beauty series 2700K available in 1300lm or 2000lm CRI95
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

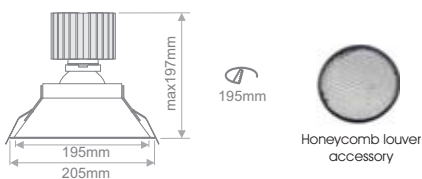

Ordering Code Example:
 ZETA - 30 - X2000 - FX - 83 - 14 - BL - A1 - 00



Interior Ceiling Recessed


ZETA B

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories					
ZETA 14.1W (ZETA 14)	[27B1763]	2700K - 1763lm	(FX) Fixed	(80) 80				COVER [0X] Standard [2X] Honeycomb ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit					
	[30B1854]	3000K - 1854lm											
	[40B1910]	4000K - 1910lm											
	[57B2002]	5700K - 2002lm											
ZETA 18.9W (ZETA 19)	[27B2591]	2700K - 2591lm											
	[30B2699]	3000K - 2699lm											
	[40B2807]	4000K - 2807lm											
	[57B2942]	5700K - 2942lm											
ZETA 30.7W (ZETA 31)	[27B4143]	2700K - 4143lm											
	[30B4335]	3000K - 4335lm											
	[40B4489]	4000K - 4489lm											
	[57B4704]	5700K - 4704lm											
ZETA 14.1W (ZETA 14)	[27B1469]	2700K - 1469lm	(90) 90		[14] 14°	[WH] White [BL] Black							
	[30B1524]	3000K - 1524lm			[25] 25°								
	[40B1634]	4000K - 1634lm			[39] 39°								
ZETA 18.9W (ZETA 19)	[27B2159]	2700K - 2159lm											
	[30B2240]	3000K - 2240lm											
	[40B2403]	4000K - 2403lm											
ZETA 30.7W (ZETA 31)	[27B3452]	2700K - 3452lm											
	[30B3582]	3000K - 3582lm											
	[40B3841]	4000K - 3841lm											
ZETA 14.5W (ZETA 15)	[27B1268]	2700K - 1268lm			(97) 97								
	[30B1353]	3000K - 1353lm											
ZETA 19.4W (ZETA 19)	[27B1813]	2700K - 1813lm											
	[30B1949]	3000K - 1949lm											
ZETA 31.3W (ZETA 31)	[27B3048]	2700K - 3048lm											
	[30B3245]	3000K - 3245lm											

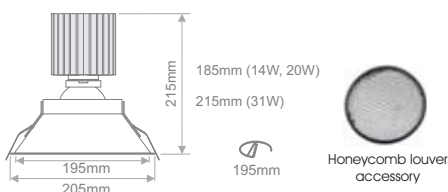

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
ZETA 19 - 40B2403 - FX - 90 - 39 - WH - DL - 00

ZETA MINI X

Interior Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
 1300lm: **11.7W**
 2000lm: **19.5W**
 3000lm: **29.3W**
 4000lm: **39.1W**
 5000lm: **46.8W**

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories	
ZETA MINI (ZETA MINI)	(27) 2700K (30) 3000K (35) 3500K (40) 4000K	(X1300) 1300lm	(FX) Fixed	(83) 83	(14) 14° (25) 25° (39) 39°	(WH) White (BL) Black	(00) Without Driver (ND) Non-Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (WL) Wireless**	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit	
		(X2000) 2000lm							
		(X3000) 3000lm							
		(X4000) 4000lm							
		(X5000) 5000lm							
	(X1300) 1300lm (X2000) 2000lm (X3000) 3000lm				(97) 97				

* Vibrant V80 for CRI83 available in 3000K,
 Vibrant V95 for CRI97 available in 3000K,
 Beauty series 2700K available in 1300lm or 2000lm CRI95
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

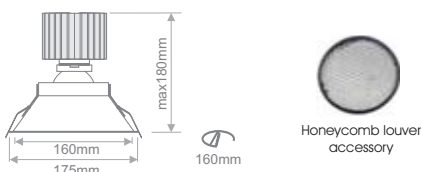

Ordering Code Example:
 ZETA MINI - 30 - X2000 - FX - 83 - 14 - BL - A1 - 00



Interior Ceiling Recessed


ZETA MINI B

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories					
ZETA MINI 14.1W (ZETA M14)	[27B1763]	2700K - 1763lm	(FX) Fixed	(80) 80				COVER [0X] Standard [2X] Honeycomb ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit					
	[30B1854]	3000K - 1854lm											
	[40B1910]	4000K - 1910lm											
	[57B2002]	5700K - 2002lm											
ZETA MINI 18.9W (ZETA M19)	[27B2591]	2700K - 2591lm											
	[30B2699]	3000K - 2699lm											
	[40B2807]	4000K - 2807lm											
	[57B2942]	5700K - 2942lm											
ZETA MINI 30.7W (ZETA M31)	[27B4143]	2700K - 4143lm											
	[30B4335]	3000K - 4335lm											
	[40B4489]	4000K - 4489lm											
	[57B4704]	5700K - 4704lm											
ZETA MINI 14.1W (ZETA M14)	[27B1469]	2700K - 1469lm	(90) 90		[14] 14°	(WH) White (BL) Black							
	[30B1524]	3000K - 1524lm			[25] 25°								
	[40B1634]	4000K - 1634lm			[39] 39°								
ZETA MINI 18.9W (ZETA M19)	[27B2159]	2700K - 2159lm											
	[30B2240]	3000K - 2240lm											
	[40B2403]	4000K - 2403lm											
ZETA MINI 30.7W (ZETA M31)	[27B3452]	2700K - 3452lm											
	[30B3582]	3000K - 3582lm											
	[40B3841]	4000K - 3841lm											
ZETA MINI 14.5W (ZETA M15)	[27B1268]	2700K - 1268lm			(97) 97								
	[30B1353]	3000K - 1353lm											
ZETA MINI 19.4W (ZETA M19)	[27B1813]	2700K - 1813lm											
	[30B1949]	3000K - 1949lm											
ZETA MINI 31.3W (ZETA M31)	[27B3048]	2700K - 3048lm											
	[30B3245]	3000K - 3245lm											

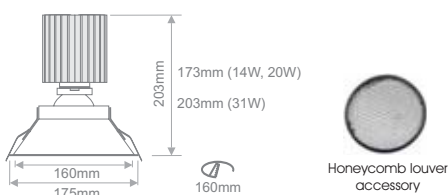

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
ZETA M19 - 40B2403 - FX - 90 - 39 - WH - DL - 00

KRONOS X

Interior Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Passive cooling through natural air flow.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
 1300lm: **11.7W**
 2000lm: **19.5W**
 3000lm: **29.3W**
 4000lm: **39.1W**
 5000lm: **46.8W**

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories	
KRONOS (KRONOS)	{27} 2700K {30} 3000K {35} 3500K {40} 4000K	{X1300} 1300lm	{FX} Fixed	{83} 83	{21} 21° {43} 43° {59} 59°	{WH} White	{00} Without Driver	COVER {0X} Standard {2X} Honeycomb ↓ {XX} EXTRAS {00} No Extras {X1} Emergency Kit	
		{X2000} 2000lm				{BL} Black	{ND} Non-Dimmable		
		{X3000} 3000lm				{GR} Grey	{A1} Analogue (1-10V)		
		{X4000} 4000lm				{NS} Nickel Satin	{DX} DMX		
		{X5000} 5000lm				{GL} Gold	{DL} DALI		
							{WL} Wireless**		
	{X1300} 1300lm {X2000} 2000lm {X3000} 3000lm	{97} 97							

* Vibrant V80 for CRI83 available in 3000K,
 Vibrant V95 for CRI97 available in 3000K,
 Beauty series 2700K available in 1300lm or 2000lm CRI95
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

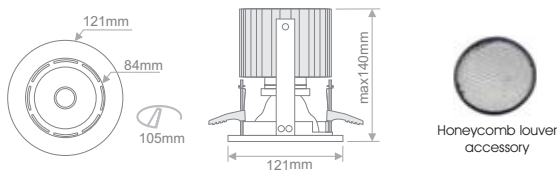

Ordering Code Example:
 KRONOS - 30 - X2000 - FX - 83 - 43 - BL - A1 - 00



Interior Ceiling Recessed

KRONOS B

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories						
KRONOS 15.2W (KRONOS 15)	[27B2173]	2700K - 2173lm	(FX) Fixed											
	[30B2263]	3000K - 2263lm												
	[40B2354]	4000K - 2354lm												
	[57B2467]	5700K - 2467lm												
KRONOS 18.9W (KRONOS 19)	[27B2591]	2700K - 2591lm												
	[30B2699]	3000K - 2699lm												
	[40B2807]	4000K - 2807lm												
	[57B2942]	5700K - 2942lm												
KRONOS 30.7W (KRONOS 31)	[27B4143]	2700K - 4143lm												
	[30B4335]	3000K - 4335lm												
	[40B4489]	4000K - 4489lm												
	[57B4704]	5700K - 4704lm												
KRONOS 15.2W (KRONOS 15)	[27B1811]	2700K - 1811lm	(90) 90											
	[30B1879]	3000K - 1879lm												
	[40B2015]	4000K - 2015lm												
KRONOS 18.9W (KRONOS 19)	[27B2159]	2700K - 2159lm												
	[30B2240]	3000K - 2240lm												
	[40B2403]	4000K - 2403lm												
KRONOS 30.7W (KRONOS 31)	[27B3452]	2700K - 3452lm												
	[30B3582]	3000K - 3582lm												
	[40B3841]	4000K - 3841lm												
KRONOS 15.7W (KRONOS 16)	[27B1506]	2700K - 1506lm							(97) 97					
	[30B1618]	3000K - 1618lm												
KRONOS 19.4W (KRONOS 19)	[27B1813]	2700K - 1813lm												
	[30B1949]	3000K - 1949lm												
KRONOS 31.3W (KRONOS 31)	[27B3048]	2700K - 3048lm												
	[30B3245]	3000K - 3245lm												

COVER

- [0X] Standard
- [1X] Diffuser
- [2X] Honeycomb

[XX]


EXTRAS

- [X0] No Extras
- [X1] Emergency Kit

- [WH] White
- [BL] Black
- [GR] Grey
- [NS] Nickel Satin
- [GL] Gold

- [00] Without Driver
- [ND] Non Dimmable
- [A1] Analogue (1..10V)
- [DX] DMX
- [DL] DALI
- [PS] Push Switch
- [PC] Phase Cut
- [WL] Wireless **

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

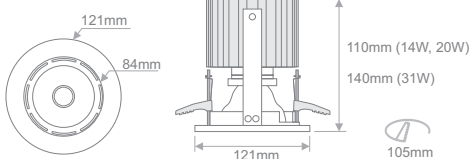

Ordering Code Example:

KRONOS 19 - 40B2403 - FX - 90 - 38 - WH - DL - 00

ALTRA X

Interior Ceiling Recessed 


- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.



Wattage:
1300lm: **11.7W**
2000lm: **19.5W**
3000lm: **29.3W**

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
ALTRA (ALTRA)	(27) 2700K	(X1300) 1300lm	[AD] Adjustable	[83] 83 [97] 97	(21) 21°	[WH] White	(00) Without Driver	COVER [0X] Standard [2X] Honeycomb ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30) 3000K	(X2000) 2000lm			(43) 43°	[BL] Black	[ND] Non-Dimmable	
	(35) 3500K	(X3000) 3000lm			(59) 59°	[GR] Grey	[A1] Analogue (1-10V)	
	(40) 4000K					[NS] Nickel Satin	[DX] DMX	
						[GL] Gold	[DL] DALI	
							[WL] Wireless**	



* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
ALTRA - 30 - X2000 - AD - 83 - 43 - BL - A1 - 00



Interior Ceiling Recessed


ALTRA B

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories						
ALTRA 14.1W (ALTRA 14)	(27B1763)	2700K - 1763lm	Adjustable (AD)	(80) 80				COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit						
	(30B1854)	3000K - 1854lm												
	(40B1910)	4000K - 1910lm												
	(57B2002)	5700K - 2002lm												
ALTRA 20.8W (ALTRA 21)	(27B2800)	2700K - 2800lm												
	(30B2917)	3000K - 2917lm												
	(40B3034)	4000K - 3034lm												
	(57B3180)	5700K - 3180lm												
ALTRA 30.7W (ALTRA 31)	(27B4143)	2700K - 4143lm												
	(30B4335)	3000K - 4335lm												
	(40B4489)	4000K - 4489lm												
	(57B4704)	5700K - 4704lm												
ALTRA 14.1W (ALTRA 14)	(27B1469)	2700K - 1469lm	Adjustable (AD)	(90) 90		(WH) White (BL) Black (GR) Grey (NS) Nickel Satin (GL) Gold								
	(30B1524)	3000K - 1524lm												
	(40B1634)	4000K - 1634lm												
ALTRA 20.8W (ALTRA 21)	(27B2333)	2700K - 2333lm												
	(30B2421)	3000K - 2421lm												
	(40B2597)	4000K - 2597lm												
ALTRA 30.7W (ALTRA 31)	(27B3452)	2700K - 3452lm												
	(30B3582)	3000K - 3582lm												
	(40B3841)	4000K - 3841lm												
ALTRA 14.5W (ALTRA 15)	(27B1268)	2700K - 1268lm							Adjustable (AD)	(97) 97				
	(30B1353)	3000K - 1353lm												
ALTRA 21.4W (ALTRA 21)	(27B1967)	2700K - 1967lm												
	(30B2114)	3000K - 2114lm												
ALTRA 31.3W (ALTRA 31)	(27B3048)	2700K - 3048lm												
	(30B3245)	3000K - 3245lm												

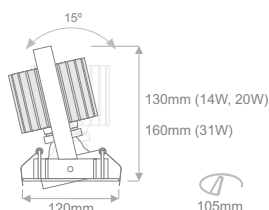

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
ALTRA 31 - 40B3841 - AD - 90 - 43 - WH - DX - 00

VITA X

Interior Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
1300lm:11.7W
2000lm:19.5W
3000lm:29.3W

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
VITA (VITA)	(27) 2700K	(X1300) 1300lm	Adjustable (AD)	(83) 83 (97) 97	(34) 34°	(WH) White	(00) Without Driver	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (0) No Extras (1) Emergency Kit
	(30) 3000K	(X2000) 2000lm				(BL) Black	(ND) Non-Dimmable	
	(35) 3500K	(X3000) 3000lm				(GR) Grey	(A1) Analogue (1-10V)	
	(40) 4000K						(DX) DMX	
							(DL) DALI	
							(WL) Wireless**	

* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.

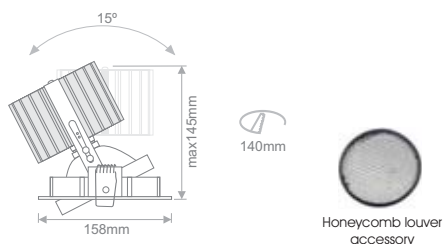

Ordering Code Example:
VITA - 30 - X2000 - AD - 83 - 34 - BL - A1 - 00



Interior Ceiling Recessed


VITA B

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories						
VITA 14.1W (VITA 14)	[27B1763]	2700K - 1763lm	(AD) Adjustable	(80) 80	(34) 34°	[WH] White [BL] Black [GR] Grey	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard [2X] Honeycomb ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit						
	[30B1854]	3000K - 1854lm												
	[40B1910]	4000K - 1910lm												
	[57B2002]	5700K - 2002lm												
VITA 20.8W (VITA 21)	[27B2800]	2700K - 2800lm												
	[30B2917]	3000K - 2917lm												
	[40B3034]	4000K - 3034lm												
	[57B3180]	5700K - 3180lm												
VITA 30.7W (VITA 31)	[27B4143]	2700K - 4143lm												
	[30B4335]	3000K - 4335lm												
	[40B4489]	4000K - 4489lm												
	[57B4704]	5700K - 4704lm												
VITA 14.1W (VITA 14)	[27B1469]	2700K - 1469lm	(90) 90	(97) 97										
	[30B1524]	3000K - 1524lm												
	[40B1634]	4000K - 1634lm												
VITA 20.8W (VITA 21)	[27B2333]	2700K - 2333lm												
	[30B2421]	3000K - 2421lm												
	[40B2597]	4000K - 2597lm												
VITA 30.7W (VITA 31)	[27B3452]	2700K - 3452lm												
	[30B3582]	3000K - 3582lm												
	[40B3841]	4000K - 3841lm												
VITA 14.5W (VITA 15)	[27B1268]	2700K - 1268lm							(97) 97					
	[30B1353]	3000K - 1353lm												
VITA 21.4W (VITA 21)	[27B1967]	2700K - 1967lm												
	[30B2114]	3000K - 2114lm												
VITA 31.3W (VITA 31)	[27B3048]	2700K - 3048lm												
	[30B3245]	3000K - 3245lm												

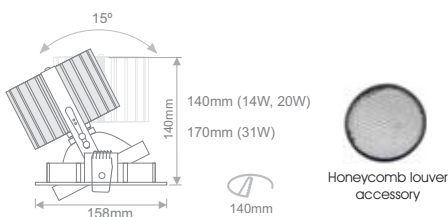

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
VITA 31 - 40B3841 - AD - 90 - 34 - WH - DX - 00

LIBRA X

Interior Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
1300lm: **11.7W**
2000lm: **19.5W**
3000lm: **29.3W**

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
LIBRA (LIBRA)	(27) 2700K	(X1300) 1300lm	(FX) Fixed	(83) 83 (97) 97	(14) 14°	(AL) Aluminium	(00) Without Driver	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30) 3000K	(X2000) 2000lm			(25) 25°	(WH) White	(ND) Non-Dimmable	
	(35) 3500K	(X3000) 3000lm			(39) 39°	(BL) Black	(A1) Analogue (1-10V)	
	(40) 4000K					(GR) Grey	(DX) DMX (DL) DALI (WL) Wireless**	

* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.

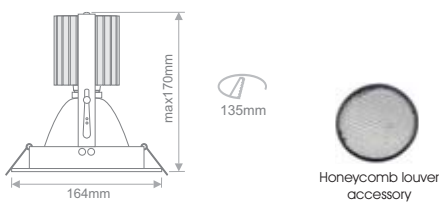

Ordering Code Example:
LIBRA - 30 - X2000 - FX - 83 - 39 - BL - A1 - 00



Interior Ceiling Recessed


LIBRA B

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories											
LIBRA 14.1W (LIBRA 14)	[27B1763]	2700K - 1763lm	(FX) Fixed	(80) 80				COVER [0X] Standard [2X] Honeycomb ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit											
	[30B1854]	3000K - 1854lm																	
	[40B1910]	4000K - 1910lm																	
	[57B2002]	5700K - 2002lm																	
LIBRA 20.8W (LIBRA 21)	[27B2800]	2700K - 2800lm																	
	[30B2917]	3000K - 2917lm																	
	[40B3034]	4000K - 3034lm																	
	[57B3180]	5700K - 3180lm																	
LIBRA 30.7W (LIBRA 31)	[27B4143]	2700K - 4143lm																	
	[30B4335]	3000K - 4335lm																	
	[40B4489]	4000K - 4489lm																	
	[57B4704]	5700K - 4704lm																	
LIBRA 14.1W (LIBRA 14)	[27B1469]	2700K - 1469lm	(90) 90	(14) 14°		[AL] Aluminium	[A1] Analogue (1..10V)												
	[30B1524]	3000K - 1524lm				[WH] White	[DX] DMX												
	[40B1634]	4000K - 1634lm				[BL] Black	[DL] DALI												
LIBRA 20.8W (LIBRA 21)	[27B2333]	2700K - 2333lm				(90) 90	(25) 25°		[GR] Grey	[PS] Push Switch									
	[30B2421]	3000K - 2421lm							[PC] Phase Cut										
	[40B2597]	4000K - 2597lm							[WL] Wireless **										
LIBRA 30.7W (LIBRA 31)	[27B3452]	2700K - 3452lm							(97) 97	(39) 39°									
	[30B3582]	3000K - 3582lm																	
	[40B3841]	4000K - 3841lm																	
LIBRA 14.5W (LIBRA 15)	[27B1268]	2700K - 1268lm										(97) 97							
	[30B1353]	3000K - 1353lm																	
LIBRA 21.4W (LIBRA 21)	[27B1967]	2700K - 1967lm													(97) 97				
	[30B2114]	3000K - 2114lm																	
LIBRA 31.3W (LIBRA 31)	[27B3048]	2700K - 3048lm	(97) 97																
	[30B3245]	3000K - 3245lm																	

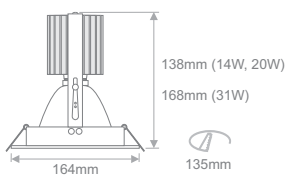

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
LIBRA 31 - 30B3582 - FX - 90 - 39 - WH - DL - 00

MARS + MARS ADJ

Interior Ceiling Recessed 


- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories				
MARS A 17.1W (MARS A17)	[27B2382]	2700K - 2382lm	Adjustable (AD)	[80] 80				COVER [0X] Standard [1X] Diffuser [2X] Honeycomb ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit				
	[30B2481]	3000K - 2481lm										
MARS 17.1W (MARS 17)	[40B2581]	4000K - 2581lm										
	[57B2705]	5700K - 2705lm										
MARS A 30.7W (MARS A31)	[27B4143]	2700K - 4143lm										
	[30B4335]	3000K - 4335lm										
MARS 30.7W (MARS 31)	[40B4489]	4000K - 4489lm										
	[57B4704]	5700K - 4704lm										
MARS A 17.1W (MARS A17)	[27B1985]	2700K - 1985lm							Fixed (FX)	[90] 90	[10] 10° [30] 30° [45] 45°	[WH] White [BL] Black [GR] Grey
	[30B2060]	3000K - 2060lm										
MARS 17.1W (MARS 17)	[40B2209]	4000K - 2209lm										
	[27B3452]	2700K - 3452lm										
MARS A 30.7W (MARS A31)	[30B3582]	3000K - 3582lm										
MARS 30.7W (MARS 31)	[40B3841]	4000K - 3841lm										
MARS A 17.5W (MARS A18)	[27B1660]	2700K - 1660lm		[97] 97								
	[30B1783]	3000K - 1783lm										
MARS 17.5W (MARS 18)												
MARS A 31.3W (MARS A31)	[27B3048]	2700K - 3048lm										
MARS 31.3W (MARS 31)	[30B3245]	3000K - 3245lm										

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

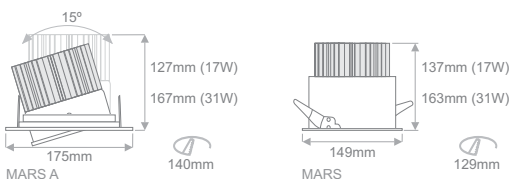

Ordering Code Example:
MARS 31 - 40B3841 - FX - 90 - 45 - WH - DL - 00



Interior Ceiling Recessed


- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories					
MARS SQ 17.1W (MARS SQ17)	(27B2382)	2700K - 2382lm	(FX) Fixed	(80) 80	(10) 10° (30) 30° (45) 45°	(WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1..10V) (DX) DMX (DL) DALI (PS) Push Switch (PC) Phase Cut (WL) Wireless **	COVER <input checked="" type="checkbox"/> Standard <input type="checkbox"/> XX EXTRAS <input checked="" type="checkbox"/> No Extras <input type="checkbox"/> Emergency Kit					
	(30B2481)	3000K - 2481lm											
	(40B2581)	4000K - 2581lm											
	(57B2705)	5700K - 2705lm											
MARS SQ 30.7W (MARS SQ31)	(27B4143)	2700K - 4143lm											
	(30B4335)	3000K - 4335lm											
	(40B4489)	4000K - 4489lm											
	(57B4704)	5700K - 4704lm											
MARS SQ 17.1W (MARS SQ17)	(27B1985)	2700K - 1985lm		(90) 90					(97) 97	(10) 10° (30) 30° (45) 45°	(WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1..10V) (DX) DMX (DL) DALI (PS) Push Switch (PC) Phase Cut (WL) Wireless **	COVER <input checked="" type="checkbox"/> Standard <input type="checkbox"/> XX EXTRAS <input checked="" type="checkbox"/> No Extras <input type="checkbox"/> Emergency Kit
	(30B2060)	3000K - 2060lm											
	(40B2209)	4000K - 2209lm											
MARS SQ 30.7W (MARS SQ31)	(27B3452)	2700K - 3452lm											
	(30B3582)	3000K - 3582lm											
	(40B3841)	4000K - 3841lm											
MARS SQ 17.5W (MARS SQ18)	(27B1660)	2700K - 1660lm											
	(30B1783)	3000K - 1783lm											
MARS SQ 31.3W (MARS SQ31)	(27B3048)	2700K - 3048lm											
	(30B3245)	3000K - 3245lm											

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

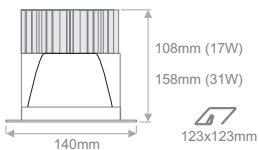

Ordering Code Example:
MARS SQ31 - 40B3841 - FX - 90 - 45 - WH - DL - 00

PELO

Interior Ceiling Recessed 

- Downlight module suitable for direct installation in ceilings (PL replacement).
- Module with integrated electronics and heatsink.
- Light engine operating with 230 VAC.



Luminous Efficacy


PELO 11.6W: **88lm/W** (3000K), **92lm/W** (4000K), **92lm/W** (6500K)

PELO 22.7W: **90lm/W** (3000K), **94lm/W** (4000K), **96lm/W** (6500K)

Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option
PELO 11.6W (PELO 11.6)	(30T1020) 3000K - 1020lm	(FX) Fixed	(80) 80	(60) 60° (90) 90°	(WH) White	(ND) Non-Dimmable 230VAC
	(40T1070) 4000K - 1070lm					
	(65T1070) 6500K - 1070lm					
PELO 22.7W (PELO 22.7)	(30T2040) 3000K - 2040lm	(FX) Fixed	(80) 80	(60) 60° (90) 90°	(WH) White	(ND) Non-Dimmable 230VAC
	(40T2140) 4000K - 2140lm					
	(65T2160) 6500K - 2160lm					

Ordering Code Example:

PELO 22.7 - 30T2040 - FX - 80 - 90 - WH - ND

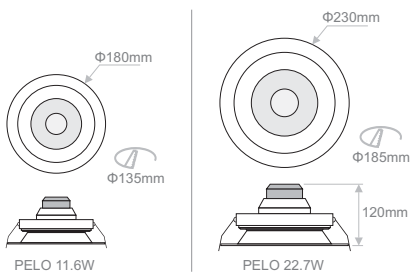



Interior Ceiling Recessed

KIRA


- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
KIRA 8.5W (KIRA 09)	(27B1154)	2700K - 1154lm	Adjustable	[80] 80			[00] Without Driver	COVER [0x] Standard ↓ [XX] EXTRAS [x0] No Extras [x1] Emergency
	(30B1213)	3000K - 1213lm					[ND] Non Dimmable	
	(40B1251)	4000K - 1251lm					[A1] Analogue (1..10V)	
	(57B1311)	5700K - 1311lm					[DX] DMX	
KIRA 8.5W (KIRA 09)	(27B0962)	2700K - 962lm	Adjustable	[90] 90	[16] 16° [42] 42° [56] 56°	[WH] White	[DL] DALI	
	(30B0997)	3000K - 997lm				[BL] Black	[PS] Push Switch	
	(40B1070)	4000K - 1070lm				[GR] Grey	[PC] Phase Cut	
KIRA 8.7W (KIRA 09)	(27B0825)	2700K - 825lm	Adjustable	[97] 97			[WL] Wireless **	
	(30B0880)	3000K - 880lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

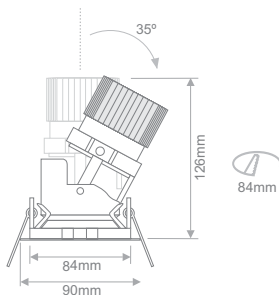


Ordering Code Example:
 KIRA 09 - 40B1070 - AD - 90 - 16 - WH - DX - 00

HELIO X

Interior Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
1300lm: **11.7W**
2000lm: **19.5W**
3000lm: **29.3W**

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
HELIO (HELIO)	(27) 2700K	(X1300) 1300lm	(AD) Adjustable	(83) 83	(34) 34°	(WH) White	(00) Without Driver	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30) 3000K	(X2000) 2000lm		(97) 97			(ND) Non-Dimmable	
	(35) 3500K	(X3000) 3000lm		(A1) Analogue (1-10V)				
	(40) 4000K			(DX) DMX				
							(DL) DALI	
							(WL) Wireless**	

* Vibrant V80 for CRI83 available in 3000K, Vibrant V95 for CRI97 available in 3000K, Beauty series 2700K available in 1300lm or 2000lm CRI95
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
 HELIO - 30 - X2000 - AD - 83 - 34 - WH - A1 - 00

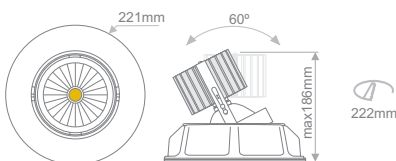




Interior Ceiling Recessed

HELIO B


- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
HELIO 14.1W (HELIO 14)	(27B1763)	2700K - 1763lm	(AD) Adjustable	(80) 80	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30B1854)	3000K - 1854lm						
	(40B1910)	4000K - 1910lm						
	(57B2002)	5700K - 2002lm						
HELIO 20.8W (HELIO 21)	(27B2800)	2700K - 2800lm	(AD) Adjustable	(90) 90	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30B2917)	3000K - 2917lm						
	(40B3034)	4000K - 3034lm						
	(57B3180)	5700K - 3180lm						
HELIO 14.1W (HELIO 14)	(27B1469)	2700K - 1469lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30B1524)	3000K - 1524lm						
	(40B1634)	4000K - 1634lm						
HELIO 20.8W (HELIO 21)	(27B2333)	2700K - 2333lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30B2421)	3000K - 2421lm						
	(40B2597)	4000K - 2597lm						
HELIO 14.5W (HELIO 15)	(27B1268)	2700K - 1268lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30B1353)	3000K - 1353lm						
HELIO 21.4W (HELIO 21)	(27B1967)	2700K - 1967lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30B2114)	3000K - 2114lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

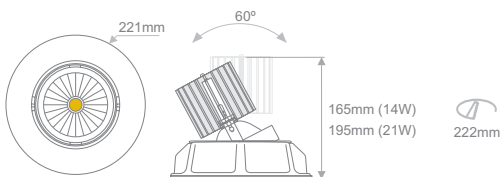


Ordering Code Example:
 HELIO 21 - 40B2597 - AD - 90 - 34 - WH - DL - 00

PANDORA X

Interior Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
1300lm: **11.7W**
2000lm: **19.5W**
3000lm: **29.3W**

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
PANDORA (PANDORA)	(27) 2700K	(X1300) 1300lm	(AD) Adjustable	(83) 83	(34) 34°	(WH) White	(00) Without Driver	COVER <input checked="" type="checkbox"/> Standard <input type="checkbox"/> XX EXTRAS <input checked="" type="checkbox"/> No Extras <input type="checkbox"/> (X1) Emergency Kit
	(30) 3000K	(X2000) 2000lm		(97) 97			(ND) Non-Dimmable	
	(35) 3500K	(X3000) 3000lm		(A1) Analogue (1-10V)				
	(40) 4000K			(DX) DMX				
							(DL) DALI	
							(WL) Wireless**	

* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
PANDORA - 30 - X2000 - AD - 83 - 34 - WH - A1 - 00

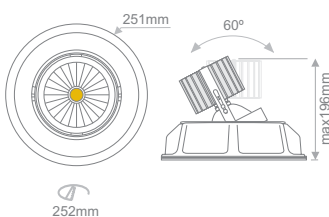




Interior Ceiling Recessed

PANDORA B


- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories						
PANDORA 14.1W (PANDORA 14)	(27B1763)	2700K - 1763lm	Adjustable (AD)	(80) 80	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit						
	(30B1854)	3000K - 1854lm												
	(40B1910)	4000K - 1910lm												
	(57B2002)	5700K - 2002lm												
PANDORA 18.9W (PANDORA 19)	(27B2591)	2700K - 2591lm												
	(30B2699)	3000K - 2699lm												
	(40B2807)	4000K - 2807lm												
	(57B2942)	5700K - 2942lm												
PANDORA 14.1W (PANDORA 14)	(27B1469)	2700K - 1469lm							Adjustable (AD)	(90) 90	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30B1524)	3000K - 1524lm												
	(40B1634)	4000K - 1634lm												
PANDORA 18.9W (PANDORA 19)	(27B2159)	2700K - 2159lm												
	(30B2240)	3000K - 2240lm												
	(40B2403)	4000K - 2403lm												
PANDORA 14.5W (PANDORA 15)	(27B1268)	2700K - 1268lm	Adjustable (AD)	(97) 97	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit						
	(30B1353)	3000K - 1353lm												
PANDORA 19.4 (PANDORA 19)	(27B1813)	2700K - 1813lm												
	(30B1949)	3000K - 1949lm												

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

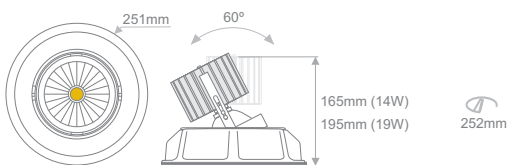

Ordering Code Example:
PANDORA 19 - 40B2403 - AD - 90 - 34 - WH - DL - 00

HEKTOR X

Interior Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
1300lm: **11.7W**
2000lm: **19.5W**
3000lm: **29.3W**

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
HEKTOR (HEKTOR)	(27) 2700K	(X1300) 1300lm	(AD) Adjustable	(83) 83 (97) 97	(34) 34°	(WH) White	(00) Without Driver	COVER <input checked="" type="checkbox"/> Standard <input type="checkbox"/> XX EXTRAS <input checked="" type="checkbox"/> No Extras <input checked="" type="checkbox"/> Emergency Kit
	(30) 3000K	(X2000) 2000lm					(ND) Non-Dimmable	
	(35) 3500K	(X3000) 3000lm					(A1) Analogue (1-10V)	
	(40) 4000K						(DX) DMX (DL) DALI (WL) Wireless**	

* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
HEKTOR - 30 - X2000 - AD - 83 - 34 - WH - A1 - 00


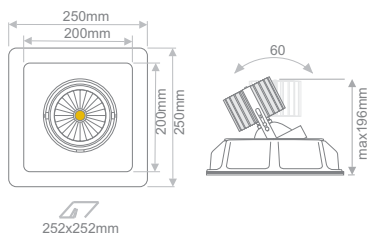




Interior Ceiling Recessed

HEKTOR B


- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories						
HEKTOR 14.1W (HEKTOR 14)	(27B1763)	2700K - 1763lm	(AD) Adjustable	(80) 80	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit						
	(30B1854)	3000K - 1854lm												
	(40B1910)	4000K - 1910lm												
	(57B2002)	5700K - 2002lm												
HEKTOR 18.9W (HEKTOR 19)	(27B2591)	2700K - 2591lm												
	(30B2699)	3000K - 2699lm												
	(40B2807)	4000K - 2807lm												
	(57B2942)	5700K - 2942lm												
HEKTOR 14.1W (HEKTOR 14)	(27B1469)	2700K - 1469lm							(90) 90	(90) 90	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30B1524)	3000K - 1524lm												
	(40B1634)	4000K - 1634lm												
HEKTOR 18.9W (HEKTOR 19)	(27B2159)	2700K - 2159lm												
	(30B2240)	3000K - 2240lm												
	(40B2403)	4000K - 2403lm												
HEKTOR 14.5W (HEKTOR 15)	(27B1268)	2700K - 1268lm	(97) 97	(97) 97	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit						
	(30B1353)	3000K - 1353lm												
HEKTOR 19.4 (HEKTOR 19)	(27B1813)	2700K - 1813lm												
	(30B1949)	3000K - 1949lm												

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

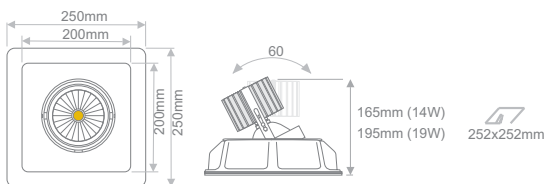


Ordering Code Example:
HEKTOR 14 - 40B1634 - AD - 90 - 34 - WH - DL - 00

GALINO X

Interior Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
2600lm: **23.4W**
4000lm: **39W**
6000lm: **58.6W**

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
GALINO (GALINO)	[27] 2700K	[X2600] 2600lm	(AD) Adjustable	[83] 83 [97] 97	[34] 34°	[WH] White	[00] Without Driver	COVER <input checked="" type="checkbox"/> Standard <input type="checkbox"/> [XX] EXTRAS <input checked="" type="checkbox"/> [X0] No Extras <input checked="" type="checkbox"/> [X1] Emergency Kit
	[30] 3000K	[X4000] 4000lm					[ND] Non-Dimmable	
	[35] 3500K	[X6000] 6000lm					[A1] Analogue (1-10V)	
	[40] 4000K						[DX] DMX [DL] DALI [WL] Wireless**	

* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
GALINO- 30 - X4000 - AD - 83 - 34 - WH - A1 - 00

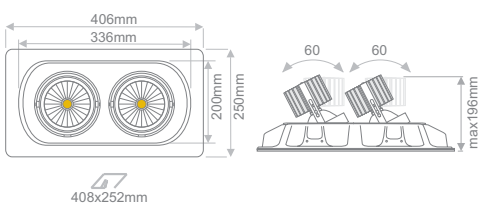




Interior Ceiling Recessed

GALINO B



- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
GALINO 23.4W (GALINO 23)	[27B3508]	2700K - 3508lm	(AD) Adjustable	(80) 80	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	[30B3656]	3000K - 3656lm						
	[40B3802]	4000K - 3802lm						
	[57B3984]	5700K - 3984lm						
GALINO 37.8W (GALINO 38)	[27B5182]	2700K - 5182lm	(AD) Adjustable	(90) 90	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	[30B5398]	3000K - 5398lm						
	[40B5614]	4000K - 5614lm						
	[57B5884]	5700K - 5884lm						
GALINO 23.4W (GALINO 23)	[27B2924]	2700K - 2924lm	(AD) Adjustable	(90) 90	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	[30B3034]	3000K - 3034lm						
	[40B3254]	4000K - 3254lm						
GALINO 37.8W (GALINO 38)	[27B4318]	2700K - 4318lm	(AD) Adjustable	(90) 90	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	[30B4480]	3000K - 4480lm						
	[40B4806]	4000K - 4806lm						
GALINO 23.8W (GALINO 23)	[27B2396]	2700K - 2396lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	[30B2574]	3000K - 2574lm						
GALINO 38.8W (GALINO 39)	[27B3606]	2700K - 3606lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	[30B3898]	3000K - 3898lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

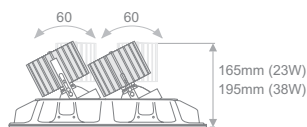

408x252mm

Ordering Code Example:

GALINO 23 - 40B3254 - AD - 90 - 34 - WH - DL - 00

AMOS + AMOS XL

Interior Ceiling Recessed 

- The base of the luminaire is plaster.
- Ideal for high demanding architectural spaces.
- CREE LED.










AMOS



AMOS XL



Code	Model	LED Source	Watt	Voltage					IP 	
PCR.025	AMOS	CREE LED	9W	230VAC	30°	Included	1,72Kg	158x158mm	IP20	
PCR.026	AMOS XL	CREE LED	9W	230VAC	30°	Included	1,83Kg	158x158mm	IP20	

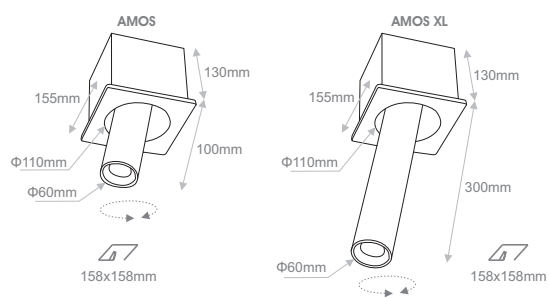



Interior Ceiling Recessed

CRATER

- Dimmable options.
- 2-3 SDCM
- L70/B50 50.000h




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
CRATER 14.1W (CRATER 14)	[27B1763]	2700K - 1763lm	[AD] Adjustable	[80] 80	[16] 16° [40] 40°	[WH] White [BL] Black	[00] Without Driver	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	[30B1854]	3000K - 1854lm					[ND] Non Dimmable	
	[40B1910]	4000K - 1910lm					[A1] Analogue (1..10V)	
	[57B2002]	5700K - 2002lm					[DX] DMX	
CRATER 14.1W (CRATER 14)	[27B1469]	2700K - 1469lm	[90] 90	[97] 97	[WH] White [BL] Black	[DL] DALI		
	[30B1524]	3000K - 1524lm				[PS] Push Switch		
	[40B1634]	4000K - 1634lm				[PC] Phase Cut [WL] Wireless **		
CRATER 14.5W (CRATER 15)	[27B1268]	2700K - 1268lm	[97] 97	[97] 97	[WH] White [BL] Black	[PC] Phase Cut	EXTRAS [X0] No Extras [X1] Emergency Kit	
	[30B1353]	3000K - 1353lm				[WL] Wireless **		

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

CRATER 14 - 40B1634 - AD - 90 - 16 - WH - DX - 00

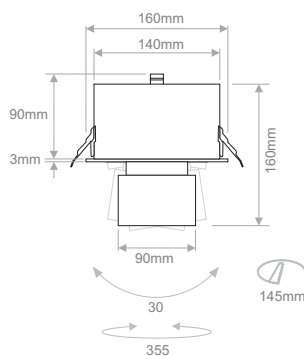

VELA

Interior Ceiling Recessed 


- Dimmable options.
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories	
VELA 15.2W (VELA 15)	[27B2173]	2700K - 2173lm	(AD) Adjustable	(80) 80	[16] 16° [40] 40°	[WH] White [BL] Black	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] ↑ EXTRAS [X0] No Extras [X1] Emergency Kit	
	[30B2263]	3000K - 2263lm							
	[40B2354]	4000K - 2354lm							
	[57B2467]	5700K - 2467lm							
VELA DOUBLE 30.4W (VELA D30)	[27B4346]	2700K - 4346lm							
	[30B4526]	3000K - 4526lm							
	[40B4708]	4000K - 4708lm							
	[57B4934]	5700K - 4934lm							
VELA 15.2W (VELA 15)	[27B1811]	2700K - 1811lm		(90) 90					(97) 97
	[30B1879]	3000K - 1879lm							
	[40B2015]	4000K - 2015lm							
VELA DOUBLE 30.4W (VELA D30)	[27B3622]	2700K - 3622lm							
	[30B3758]	3000K - 3758lm							
	[40B4030]	4000K - 4030lm							
VELA 15.7W (VELA 16)	[27B1506]	2700K - 1506lm							
	[30B1618]	3000K - 1618lm							
VELA DOUBLE 31.4W (VELA D31)	[27B3012]	2700K - 3012lm							
	[30B3236]	3000K - 3236lm							

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

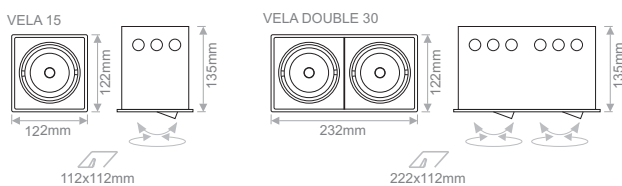

Ordering Code Example:
VELA D30 - 40B4030 - AD - 90 - 16 - WH - DL - 00



Interior Ceiling Recessed

URANUS + URANUS ADJ


- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
URANUS A 14.1W (URANUS A14)	(27B1763) 2700K - 1763lm (30B1854) 3000K - 1854lm							
URANUS 14.1W (URANUS 14)	(40B1910) 4000K - 1910lm (57B2002) 5700K - 2002lm			(80) 80				
URANUS A 20.8W (URANUS A21)	(27B2800) 2700K - 2800lm (30B2917) 3000K - 2917lm							
URANUS 20.8W (URANUS 21)	(40B3034) 4000K - 3034lm (57B3180) 5700K - 3180lm							
URANUS A 14.1W (URANUS A14)	(27B1469) 2700K - 1469lm (30B1524) 3000K - 1524lm		(AD) Adjustable	(90) 90	(16) 16° (26) 26° (38) 38°	(WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1..10V) (DX) DMX (DL) DALI (PS) Push Switch (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (2X) Honeycomb
URANUS 14.1W (URANUS 14)	(40B1634) 4000K - 1634lm		(FX) Fixed					(XX)
URANUS A 20.8W (URANUS A21)	(27B2333) 2700K - 2333lm (30B2421) 3000K - 2421lm							
URANUS 20.8W (URANUS 21)	(40B2597) 4000K - 2597lm							EXTRAS (X0) No Extras (X1) Emergency Kit
URANUS A 14.5W (URANUS A15)	(27B1268) 2700K - 1268lm (30B1353) 3000K - 1353lm							
URANUS 14.5W (URANUS 15)				(97) 97				
URANUS A 21.4W (URANUS A21)	(27B1967) 2700K - 1967lm (30B2114) 3000K - 2114lm							
URANUS 21.4W (URANUS 21)								

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

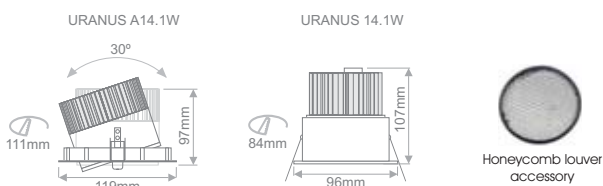

Ordering Code Example:
URANUS A21 - 40B2597 - AD - 90 - 26 - WH - DL - 00

MERLYN WD

Interior Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L70/B50 50.000h
- IP40



Warm Dimming 3000K to 1800K

LIGHTSOURCE BY
bridgelux

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
MERLYN ROUND WD 6.0W <i>(MERLYN R WD06)</i>	1800K-3000K	518lm	(AD) Adjustable	(95) 95	(20) 20 (38) 38	(WH) White (BL) Black	(A1) Analogue (1..10V) (DL) DALI (PC) Phase Cut (WL) Wireless *	COVER (0x) Standard (2x) Honeycomb (3x) Line spread lens (4x) Softening lens ↓ (XX) EXTRAS (x0) No Extras (x1) Emergency Kit
MERLYN SQUARE WD 6.0W <i>(MERLYN S WD06)</i>								
MERLYN ROUND WD 11.8W <i>(MERLYN R WD12)</i>	1800K-3000K	1045lm	(AD) Adjustable	(95) 95	(20) 20 (38) 38	(WH) White (BL) Black	(A1) Analogue (1..10V) (DL) DALI (PC) Phase Cut (WL) Wireless *	
MERLYN SQUARE WD 11.8W <i>(MERLYN S WD12)</i>								


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:


MERLYN R WD12 - 1830B1045 - AD - 95 - 38 - WH - DL - 00




Line spread lens Softening lens Honeycomb

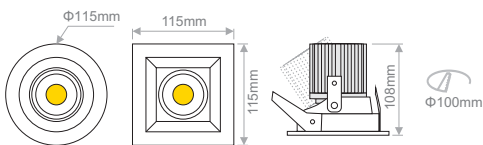

Warm dimming 3000K to 1800K (6W)

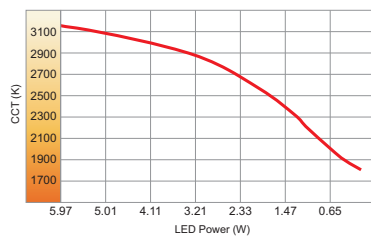

Warm dimming 3000K to 1800K (12W)

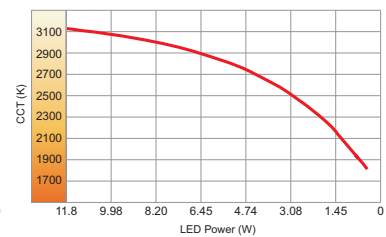

ENIGMA X

Interior Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Passive cooling through natural air flow.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
1300lm: **11.7W**
2000lm: **19.5W**

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
ENIGMA (ENIGMA)	(27) 2700K	[X1300] 1300lm [X2000] 2000lm	(AD) Adjustable	(83) 83 (97) 97	(40) 40° (56) 56°	(WH) White (BL) Black	(00) Without Driver (ND) Non-Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (WL) Wireless**	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30) 3000K							
	(35) 3500K							
	(40) 4000K							

* Vibrant V80 for CRI83 available in 3000K, Vibrant V95 for CRI97 available in 3000K, Beauty series 2700K available in 1300lm or 2000lm CRI95
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
ENIGMA - 30 - X2000 - AD - 83 - 56 - BL - A1 - 00

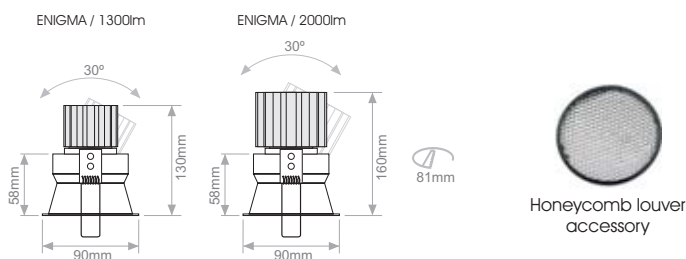



Interior Ceiling Recessed

ENIGMA B


- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
ENIGMA 8.5W (ENIGMA 09)	(27B1154)	2700K - 1154lm	Adjustable	(80) 80			(00) Without Driver	COVER (0x) Standard (2x) Honeycomb ↓ {XX} EXTRAS (x0) No Extras (x1) Emergency Kit
	(30B1213)	3000K - 1213lm					(ND) Non Dimmable	
	(40B1251)	4000K - 1251lm					(A1) Analogue (1..10V)	
	(57B1311)	5700K - 1311lm					(DX) DMX	
ENIGMA 8.5W (ENIGMA 09)	(27B0962)	2700K - 962lm	Adjustable	(90) 90	(16) 16° (42) 42° (56) 56°	(WH) White	(DL) DALI	
	(30B0997)	3000K - 997lm				(BL) Black	(PS) Push Switch	
	(40B1070)	4000K - 1070lm				(PC) Phase Cut		
ENIGMA 8.7W (ENIGMA 09)	(27B0825)	2700K - 825lm	Adjustable	(97) 97			(WL) Wireless **	
	(30B0880)	3000K - 880lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:
 ENIGMA 09 - 40B1070 - AD - 90 - 16 - WH - DX - 00

VERONA R

Interior Ceiling Recessed 


- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories	
VERONA RECESSED ROUND 10.3W (VERONA R RD10)	(27B1365) 2700K - 1365lm (30B1435) 3000K - 1435lm (40B1479) 4000K - 1479lm	2700K - 1365lm 3000K - 1435lm 4000K - 1479lm	Adjustable (AD)	(80) 80		(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1..10V) (DX) DMX (DL) DALI (PS) Push Switch (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency	
VERONA RECESSED SQUARE 10.3W (VERONA R SQ10)	(57B1550) 5700K - 1550lm	5700K - 1550lm							
VERONA RECESSED ROUND 10.3W (VERONA R RD10)	(27B1138) 2700K - 1138lm (30B1180) 3000K - 1180lm (40B1265) 4000K - 1265lm	2700K - 1138lm 3000K - 1180lm 4000K - 1265lm							
VERONA RECESSED SQUARE 10.3W (VERONA R SQ10)									
VERONA RECESSED ROUND 10.6W (VERONA R RD11)	(27B0973) 2700K - 973lm (30B1038) 3000K - 1038lm	2700K - 973lm 3000K - 1038lm							(97) 97
VERONA RECESSED SQUARE 10.6W (VERONA R SQ11)									

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

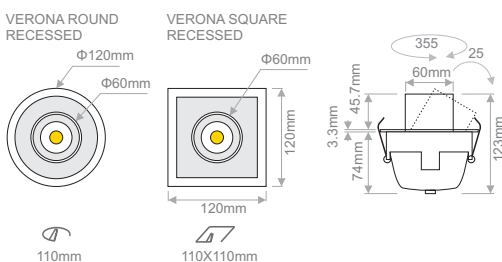


Ordering Code Example:
VERONA R RD10 - 40B1265 - AD - 90 - 24 - WH - DX - 00



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VERONA TRIMLESS ROUND 10.3W [VERONA T RD10]	[27B1365] 2700K - 1365lm [30B1435] 3000K - 1435lm [40B1479] 4000K - 1479lm	[57B1550] 5700K - 1550lm	Adjustable	[80] 80	[24] 24° [32] 32°	[WH] White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] ↑ EXTRAS [X0] No Extras [X1] Emergency
VERONA TRIMLESS ROUND 10.3W [VERONA T RD10]	[27B1138] 2700K - 1138lm [30B1180] 3000K - 1180lm [40B1265] 4000K - 1265lm							
VERONA TRIMLESS SQUARE 10.3W [VERONA T SQ10]								
VERONA TRIMLESS ROUND 10.6W [VERONA T RD11]	[27B0973] 2700K - 973lm [30B1038] 3000K - 1038lm			[97] 97				

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

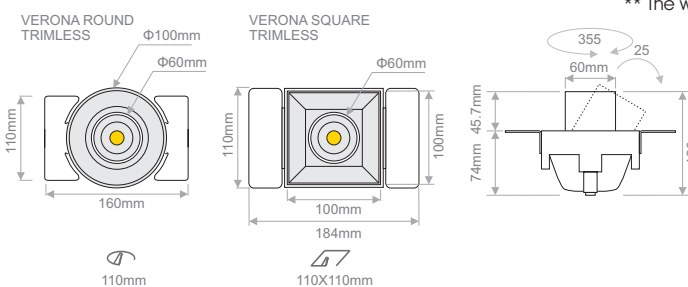

Ordering Code Example:
VERONA T RD10 - 40B1265 - AD - 90 - 24 - WH - DX - 00

VERONA SP

Interior Ceiling Recessed 

- 2-3 SDCM
- L70/B50 50.000h




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VERONA SPOT 10.3W (VERONA SP 10)	(27B1365)	2700K - 1365lm	Adjustable	(80) 80			(00) Without Driver	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency
	(30B1435)	3000K - 1435lm					(ND) Non Dimmable	
	(40B1479)	4000K - 1479lm					(A1) Analogue (1..10V)	
	(57B1550)	5700K - 1550lm					(DX) DMX	
VERONA SPOT 10.3W (VERONA SP 10)	(27B1138)	2700K - 1138lm	Adjustable	(90) 90	(24) 24° (32) 32°	[WH] White	(DL) DALI	
	(30B1180)	3000K - 1180lm					(PS) Push Switch	
	(40B1265)	4000K - 1265lm					(PC) Phase Cut	
VERONA SPOT 10.6W (VERONA SP 11)	(27B0973)	2700K - 973lm	Adjustable	(97) 97			(WL) Wireless **	
	(30B1038)	3000K - 1038lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
 VERONA SP10 - 40B1265 - AD - 90 - 24 - WH - DX - 00

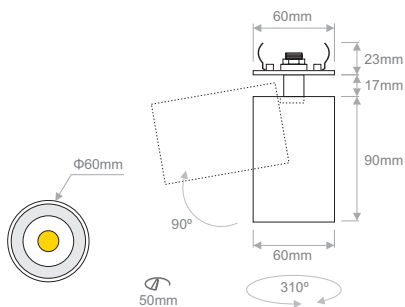



VERONA SP WD

- L70/B50 50.000h



Warm Dimming **3000K to 1800K**




Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VERONA SP WD 6.0W (VERONA SP WDO6)	(1830B0518) 1800K-3000K 518lm	(AD) Adjustable	(95) 95	(24) 24° (32) 32°	(WH) White	(A1) Analogue (1..10V) (DL) DALI (PC) Phase Cut (WL) Wireless *	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit	


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

VERONA SP WDO6 - 1830B0518 - AD - 95 - 32 - WH - DL - 00

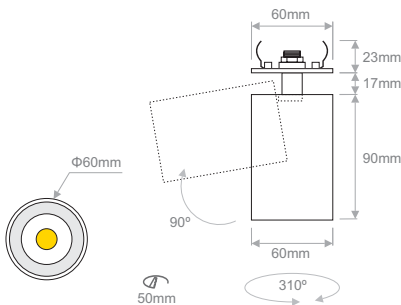

Warm dimming 3000K to 1800K (6W)

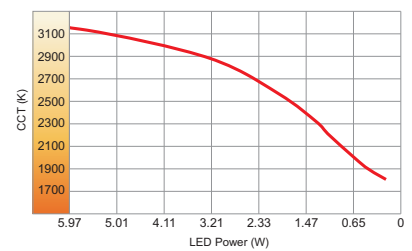

ZIBRA

Interior Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h




LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
ZIBRA 8.5W (ZIBRA 09)	[27B1154]	2700K - 1154lm	(AD) Adjustable	(80) 80			[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency
	[30B1213]	3000K - 1213lm						
	[40B1251]	4000K - 1251lm						
	[57B1311]	5700K - 1311lm						
ZIBRA 8.5W (ZIBRA 09)	[27B0962]	2700K - 962lm	(AD) Adjustable	(90) 90	[18] 18°	[WH] White	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency
	[30B0997]	3000K - 997lm			[38] 38°	[BL] Black		
	[40B1070]	4000K - 1070lm			[44] 44°	[GR] Grey		
ZIBRA 8.7W (ZIBRA 09)	[27B0825]	2700K - 825lm	(AD) Adjustable	(97) 97			[00] Without Driver [ND] Non Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency
	[30B0880]	3000K - 880lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
 ZIBRA 09 - 40B1070 - AD - 90 - 18 - WH - DX - 00

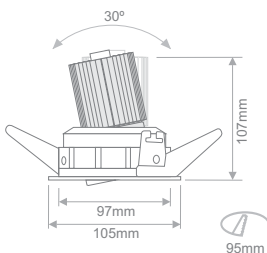



Interior Ceiling Recessed

ZIBRA WD

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L70/B50 50.000h

Warm Dimming **3000K to 1800K**




LIGHTSOURCE BY
bridgelux®

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
ZIBRA WD 6.0W (ZIBRA WD06)	{1830B0518} 1800K-3000K 518lm	{AD} Adjustable	{95} 95	{18} 18°	{WH} White	{A1} Analogue (1..10V)	COVER <input type="checkbox"/> Standard ↓ <input type="checkbox"/> XX EXTRAS <input type="checkbox"/> No Extras <input type="checkbox"/> Emergency Kit	
				{38} 38°	{BL} Black	{DL} DALI		
				{44} 44°	{GR} Grey	{PC} Phase Cut {WL} Wireless *		


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

ZIBRA WD06 - 1830B0518 - AD - 95 - 44 - WH - DL - 00

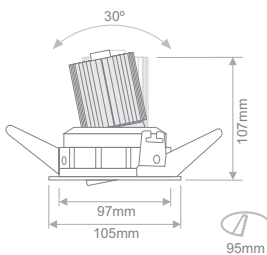

Warm dimming 3000K to 1800K (6W)

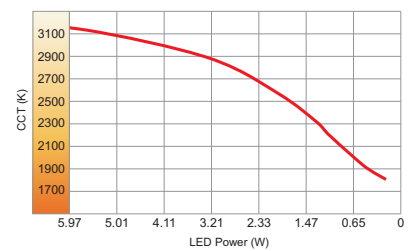

ELISE

Interior Ceiling Recessed 


- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories	
ELISE 8.5W (ELISE 09)	(27B1154)	2700K - 1154lm	(FX) Fixed	(80) 80				COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency	
	(30B1213)	3000K - 1213lm							
	(40B1251)	4000K - 1251lm							
	(57B1311)	5700K - 1311lm							
ELISE 16.1W (ELISE 16)	(27B1945)	2700K - 1945lm							
	(30B2046)	3000K - 2046lm							
	(40B2108)	4000K - 2108lm							
	(57B2209)	5700K - 2209lm							
ELISE 8.5W (ELISE 09)	(27B0962)	2700K - 962lm		(90) 90		(18) 18°	(WH) White		(00) Without Driver (ND) Non Dimmable (A1) Analogue (1..10V) (DX) DMX** (DL) DALI (PS) Push Switch (PC) Phase Cut (WL) Wireless ***
	(30B0997)	3000K - 997lm				(40) 40°	(BL) Black		
	(40B1070)	4000K - 1070lm				(45) 45°	(GR) Grey		
ELISE 16.1W (ELISE 16)	(27B1621)	2700K - 1621lm							
	(30B1682)	3000K - 1682lm							
	(40B1804)	4000K - 1804lm							
ELISE 8.7W (ELISE 09)	(27B0825)	2700K - 825lm	(97) 97						
	(30B0880)	3000K - 880lm							
ELISE 16.6W (ELISE 17)	(27B1400)	2700K - 1400lm							
	(30B1494)	3000K - 1494lm							

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** DMX dimming for ELISE 16 & ELISE 17 models goes only up to 14.5W.
 *** The wireless dimming option includes driver and Bluetooth dimming accessory.

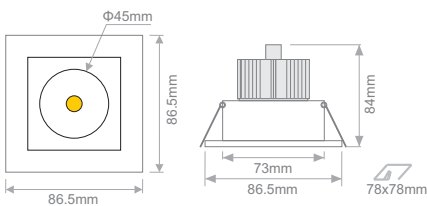

Ordering Code Example:
 ELISE 09 - 30B0997 - FX - 90 - 40 - WH - DL - 00



Interior Ceiling Recessed

ELISE WD

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L70/B50 50.000h



LIGHTSOURCE BY
bridgelux


Warm Dimming **3000K to 1800K**

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
ELISE WD 6.0W (ELISE WDO6)	(1830B0518) 1800K-3000K 518lm		(FX) Fixed	(95) 95	(18) 18° (40) 40° (45) 45°	(WH) White (BL) Black (GR) Grey	(A1) Analogue (1..10V) (DL) DALI (PC) Phase Cut (WL) Wireless *	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
ZIBRA WD 11.8W (ZIBRA WD12)	(1830B1045) 1800K-3000K 1045lm							


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:


ELISE WD12 - 1830B1045 - AD - 95 - 18 - WH - DL - 00

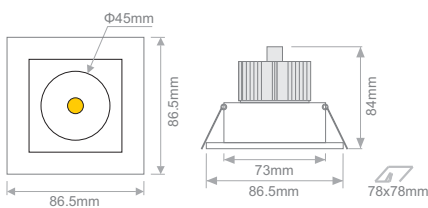

Warm dimming 3000K to 1800K (6W)

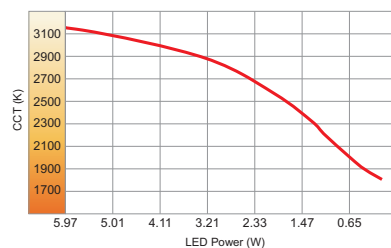

Warm dimming 3000K to 1800K (12W)

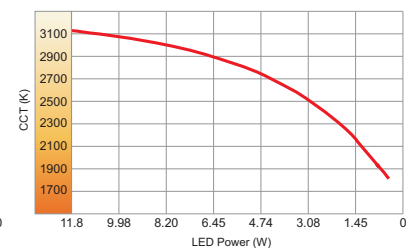

BORRELY ROUND

Interior Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Face is aluminium, processed by CNC.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h




LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY ROUND 8.9W (BORRELY R09)	(27B1089)	2700K - 1089lm	Adjustable (AD)		[38] 38°	[WH] White	[00] Without Driver [ND] Non-Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard [1X] Diffuser ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30B1135)	3000K - 1135lm						
	(40B1180)	4000K - 1180lm						
BORRELY ROUND 12.2W (BORRELY R12)	(27B1575)	2700K - 1575lm						
	(30B1657)	3000K - 1657lm						
	(40B1706)	4000K - 1706lm						
BORRELY ROUND 8.9W (BORRELY R09)	(57B1788)	5700K - 1788lm						
	(27B0908)	2700K - 908lm	[90] 90					
	(30B0946)	3000K - 946lm						
(40B1014)	4000K - 1014lm							
BORRELY ROUND 12.2W (BORRELY R12)	(27B1313)	2700K - 1313lm	[97] 97					
	(30B1362)	3000K - 1362lm						
	(40B1460)	4000K - 1460lm						
BORRELY ROUND 12.5W (BORRELY R13)	(27B1121)	2700K - 1121lm						
	(30B1196)	3000K - 1196lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
BORRELY R12 - 40B1460 - AD - 90 - 38 - WH - DX - 00

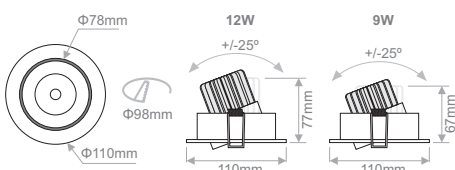



Interior Ceiling Recessed

BORRELY ROUND WD

- High efficiency deep reflector with clear cover glass.
- Face is aluminium, processed by CNC.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L70/B50 50.000h

Warm Dimming **3000K to 1800K**




LIGHTSOURCE BY
bridgelux

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY ROUND WD 6.0W (BORRELY R WD06)	(1830B0518) 1800K-3000K	518lm	[AD] Adjustable	[95] 95	[38] 38	[WH] White	[A1] Analogue (1..10V) [DL] DALI [PC] Phase Cut [WL] Wireless *	COVER <input type="checkbox"/> [0X] Standard <input checked="" type="checkbox"/> [1X] Diffuser
BORRELY ROUND WD 11.8W (BORRELY R WD12)	(1830B1045) 1800K-3000K	1045lm						<input checked="" type="checkbox"/> [XX] EXTRAS <input checked="" type="checkbox"/> [X0] No Extras <input type="checkbox"/> [X1] Emergency Kit


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:


BORRELY R WD12 - 1830B1045 - AD - 95 - 38 - WH - DL - 00

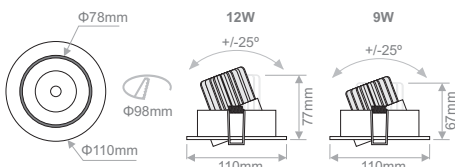

Warm dimming 3000K to 1800K (6W)

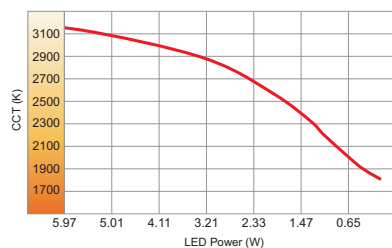

Warm dimming 3000K to 1800K (12W)

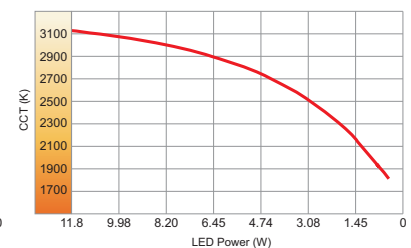

BORRELY SQUARE

Interior Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Face is aluminium, processed by CNC.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h




LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY SQUARE 8.9W (BORRELY S09)	(27B1089)	2700K - 1089lm	Adjustable (AD)		[38] 38°	[WH] White	[00] Without Driver [ND] Non-Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard [1X] Diffuser ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30B1135)	3000K - 1135lm						
	(40B1180)	4000K - 1180lm						
BORRELY SQUARE 12.2W (BORRELY S12)	(27B1575)	2700K - 1575lm						
	(30B1657)	3000K - 1657lm						
	(40B1706)	4000K - 1706lm						
	(57B1788)	5700K - 1788lm						
BORRELY SQUARE 8.9W (BORRELY S09)	(27B0908)	2700K - 908lm	Adjustable (AD)		[38] 38°	[WH] White	[00] Without Driver [ND] Non-Dimmable [A1] Analogue (1..10V) [DX] DMX [DL] DALI [PS] Push Switch [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard [1X] Diffuser ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
	(30B0946)	3000K - 946lm						
	(40B1014)	4000K - 1014lm						
BORRELY SQUARE 12.2W (BORRELY S12)	(27B1313)	2700K - 1313lm						
	(30B1362)	3000K - 1362lm						
	(40B1460)	4000K - 1460lm						
BORRELY SQUARE 12.5W (BORRELY S13)	(27B1121)	2700K - 1121lm						
	(30B1196)	3000K - 1196lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

BORRELY S12 - 40B1460 - AD - 90 - 38 - WH - DX - 00

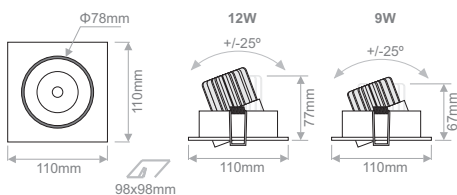



Interior Ceiling Recessed

BORRELY SQUARE WD

- High efficiency deep reflector with clear cover glass.
- Face is aluminium, processed by CNC.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L70/B50 50.000h

Warm Dimming 3000K to 1800K




LIGHTSOURCE BY
bridgelux.

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY SQUARE WD 6.0W (BORRELY S WD06)	[1830B0518] 1800K-3000K 518lm		[AD] Adjustable	[95] 95	[38] 38°	[WH] White	[A1] Analogue (1..10V) [DL] DALI [PC] Phase Cut [WL] Wireless *	COVER <input type="checkbox"/> Standard <input checked="" type="checkbox"/> Diffuser <input checked="" type="checkbox"/> [XX] EXTRAS <input checked="" type="checkbox"/> No Extras <input checked="" type="checkbox"/> Emergency Kit
BORRELY SQUARE WD 11.8W (BORRELY S WD12)	[1830B1045] 1800K-3000K 1045lm							


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:


BORRELY S WD12 - 1830B1045 - AD - 95 - 38 - WH - DL - 00

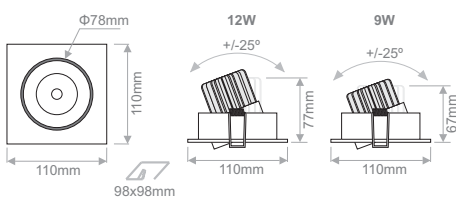

Warm dimming 3000K to 1800K (6W)

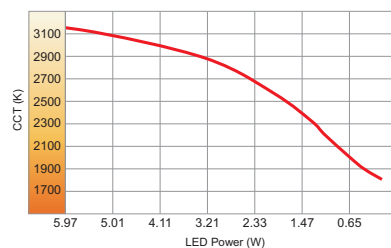

Warm dimming 3000K to 1800K (12W)

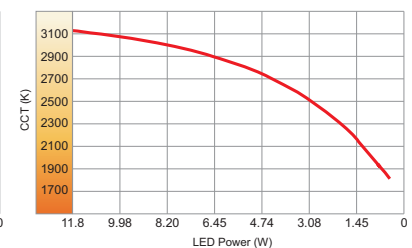

BORRELY DOUBLE SQUARE

Interior Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Face is aluminium, processed by CNC.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L70/B50 50.000h




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY DOUBLE SQUARE 17.8W (BORRELY DS18)	(27B2178)	2700K - 2178lm	Adjustable (AD)	(80) 80	(38) 38°	(WH) White	(00) Without Driver (ND) Non-Dimmable (A1) Analogue (1..10V) (DX) DMX (DL) DALI (PS) Push Switch (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (1X) Diffuser ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2270)	3000K - 2270lm						
	(40B2360)	4000K - 2360lm						
BORRELY DOUBLE SQUARE 24.4W (BORRELY DS24)	(27B3150)	2700K - 3150lm						
	(30B3314)	3000K - 3314lm						
	(40B3412)	4000K - 3412lm						
BORRELY DOUBLE SQUARE 17.8W (BORRELY DS18)	(57B3576)	5700K - 3576lm						
	(27B1816)	2700K - 1816lm	(90) 90					
	(30B1892)	3000K - 1892lm						
(40B2028)	4000K - 2028lm							
BORRELY DOUBLE SQUARE 24.4W (BORRELY DS24)	(27B2626)	2700K - 2626lm						
	(30B2724)	3000K - 2724lm						
	(40B2920)	4000K - 2920lm						
BORRELY DOUBLE SQUARE 25.0W (BORRELY DS25)	(27B2242)	2700K - 2242lm	(97) 97					
	(30B2392)	3000K - 2392lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

BORRELY DS24 - 40B2920 - AD - 90 - 38 - WH - DX - 00

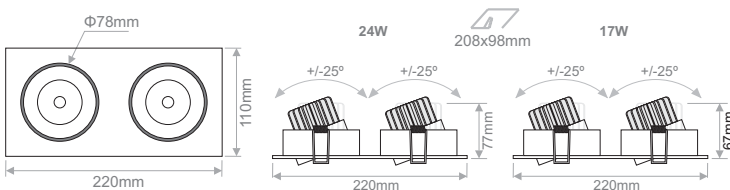



Interior Ceiling Recessed

BORRELY DOUBLE SQUARE WD

- High efficiency deep reflector with clear cover glass.
- Face is aluminium, processed by CNC.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L70/B50 50.000h




Warm Dimming 3000K to 1800K



LIGHTSOURCE BY
bridgelux.

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY DOUBLE SQUARE WD 12.0W (BORRELY DS WD12)	(1830B1036) 1800K-3000K	1036lm	(AD) Adjustable	(95) 95	(38) 38°	(WH) White	(A1) Analogue (1..10V) (DL) DALI (PC) Phase Cut (WL) Wireless *	COVER <input type="checkbox"/> Standard <input type="checkbox"/> Diffuser <input type="checkbox"/>
BORRELY DOUBLE SQUARE WD 23.6W (BORRELY DS WD24)	(1830B2090) 1800K-3000K	2090lm						EXTRAS <input type="checkbox"/> No Extras <input type="checkbox"/> Emergency Kit


* The wireless dimming option includes driver and Bluetooth dimming accessory.

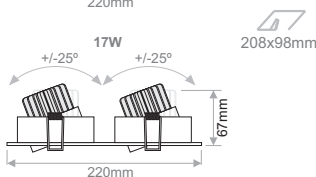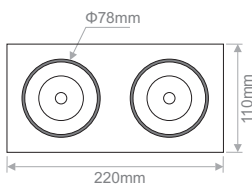


Ordering Code Example:

BORRELY DS WD24 - 1830B2090 - AD - 95 - 38 - WH - DL - 00

Warm dimming 3000K to 1800K (6W)

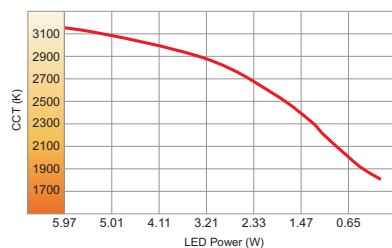

Warm dimming 3000K to 1800K (12W)

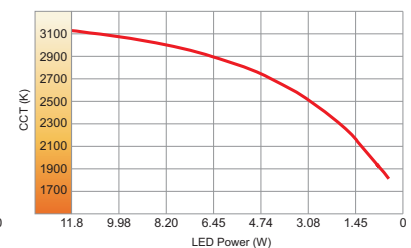

MANI

Interior Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- 2-3 SDCM
- L70/B50 50.000h




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
MANI ROUND 6.1W (MANI R06)	(27B0785)	2700K - 785lm	(FX) Fixed	(80) 80	(15) 15°	(WH) White	(00) Without Driver	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit
MANI SQUARE 6.1W (MANI S06)	(30B0817)	3000K - 817lm					(A1) Analogue (1..10V)	
	(40B0850)	4000K - 850lm		(DL) DMX				
				(PS) Push Switch				
MANI ROUND 6.1W (MANI R06)	(27B0654)	2700K - 654lm	(90) 90	(90) 90	(36) 36°	(BL) Black	(PC) Phase Cut	
MANI SQUARE 6.1W (MANI S06)	(30B0681)	3000K - 681lm					(WL) Wireless **	
	(40B0730)	4000K - 730lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
MANI R06 - 30B0681 - FX - 90 - 15 - WH - DX - 00

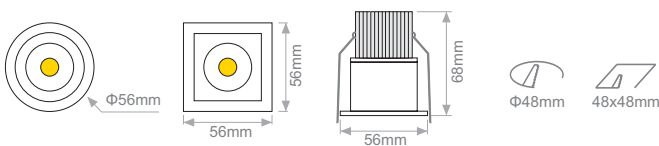

VESTA

Interior Ceiling Recessed 

- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency.
- 2-3 SDCM
- L70/B50 50.000h




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VESTA ROUND 6.1W <i>(VESTA R06)</i>	<i>(27B0785)</i>	2700K - 785lm	<i>(FX)</i> Fixed	<i>(80)</i> 80	<i>(43)</i> 43°	<i>(WH)</i> White	<i>(00)</i> Without Driver	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> ↑ EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit
VESTA SQUARE 6.1W <i>(VESTA S06)</i>	<i>(30B0817)</i>	3000K - 817lm					<i>(ND)</i> Non Dimmable	
	<i>(40B0850)</i>	4000K - 850lm		<i>(A1)</i> Analogue (1..10V)				
				<i>(DX)</i> DMX				
VESTA ROUND 6.1W <i>(VESTA R06)</i>	<i>(27B0654)</i>	2700K - 654lm	<i>(FX)</i> Fixed	<i>(90)</i> 90	<i>(43)</i> 43°	<i>(WH)</i> White	<i>(DL)</i> DALI	EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit
VESTA SQUARE 6.1W <i>(VESTA S06)</i>	<i>(30B0681)</i>	3000K - 681lm					<i>(PS)</i> Push Switch	
	<i>(40B0730)</i>	4000K - 730lm		<i>(PC)</i> Phase Cut				
				<i>(WL)</i> Wireless **				

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
VESTA R06 - 30B0681 - AD - 90 - 43 - WH - DL - 00

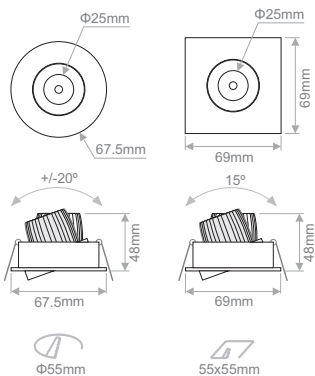



Interior Ceiling Recessed

VESTA WD

- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- L70/B50 50.000h

Warm Dimming 3000K to 1800K




LIGHTSOURCE BY
bridgelux

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VESTA ROUND WD 6.0W <i>(VESTA R WD06)</i>	1800K-3000K 518lm <i>(1830B0518)</i>		<i>(AD)</i> Adjustable	<i>(95)</i> 95	<i>(40)</i> 40°	<i>(WH)</i> White	<i>(A1)</i> Analogue (1..10V) <i>(DL)</i> DALI <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless *	COVER <i>(0X)</i> Standard
VESTA SQUARE WD 6.0W <i>(VESTA S WD06)</i>								<i>(XX)</i>
								EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit

* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

VESTA R WD06 - 1830B0518 - AD - 95 - 40 - WH - DL - 00

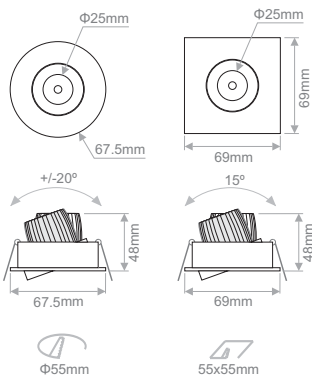

Warm dimming 3000K to 1800K (6W)

