

Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- Linear LED lighting available with milky, milky satin, ruled or transparent cover.
- Special design and construction to meet the most demanding lighting designs.
- L70 50.000h
- IP40




Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
OMEGA (OMEGA)	(AN) Anodized	(20) 2000K	(80) ≥ 80	(ML) Milky	(07W037) 7W / 37cm	24VDC (24)
		(25) 2500K		(MS) Milky Satin	(12W062) 12.2W / 62cm	
		(27) 2700K		(RL) Ruled	(17W087) 17.5W / 87cm	
		(30) 3000K		(TR) Transparent	(21W104) 21W / 104cm	
		(40) 4000K			(24W121) 24.5W / 121cm	
		(57) 5700K			(31W154) 31.5W / 154cm	
					(42W204) 42W / 204cm	

Ordering Code Example:
OMEGA - AN - 40 - 80 - MS - 24W121 - 24

Available upon request:


- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

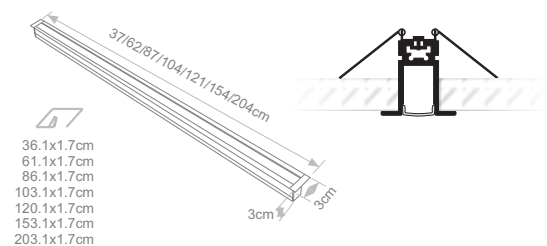

ARTBAR

Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- Available in 15° & 35°.
- The ARTBAR is ideal for wall washing / concealed lighting / decorative lighting / lighting behind plexiglass.
- L70 50,000h
- IP40



LIGHTSOURCE BY
NICHIA


Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt / Length	Voltage
ARTBAR (ARTBAR)	(AN) Anodized	(20) 2000K	(80) ≥ 80	(15) 15 (35) 35°	(07W035) 7W / 35cm	(24) 24VDC
		(25) 2500K			(12W060) 12.2W / 60cm	
		(27) 2700K			(17W085) 17.5W / 85cm	
		(30) 3000K			(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:

ARTBAR - AN - 30 - 80 - 15 - 42W202 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

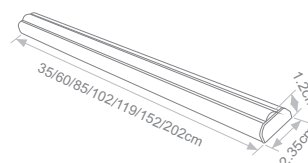



Interior Linear

ELECSYS QUATRO

RGBW in one chip

Management through:

- 4 channels DMX controller with 24VDC PWM output.
- Common Anode
- IP40



Model	Luminaire Colour	Multi Colour*	Type / Beam Angle	Watt / Length	Voltage
ELECSYS QUATRO (ELECSYS QUATRO)	(AN) Anodized	(MC) RGBW in one chip	(ML) Milky (TR) Transparent	(08W031) 7,8W / 31cm	(24) 24VDC
	(WH) White			(16W060) 15,6W / 60cm	
	(BL) Black			(21W081) 21,4W / 81cm	
				(33W124) 33,1W / 124cm	
				(49W182) 48,6W / 182cm	
				(53W197) 53,5W / 197cm	



*Available in monochromatic LEDs upon request.

Ordering Code Example:

ELECSYS QUATRO - AN - MC - TR - 49W182 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

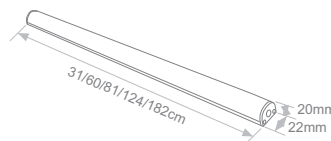


LIGUA 1

Interior Linear 


Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- LIGUA 1 aluminium profile system ideal for linear LED lighting applications.
- Variety of accessories for different corner and line extensions.
- Special design and construction to meet the most demanding lighting designs.
- Available with different CCT to meet all the architectural needs.
- L70 50.000h
- IP30

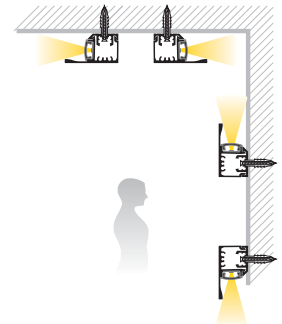

LIGHTSOURCE BY
NICHIA

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
LIGUA 1 (LIGUA 1)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(CL) Clear (OP) Opal (FR) Frosted	(07W035) 7W / 35cm	24VDC (24)
		(25) 2500K			(12W060) 12.2W / 60cm	
		(27) 2700K			(17W085) 17.5W / 85cm	
		(30) 3000K			(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

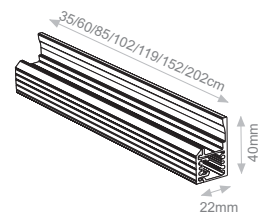

Ordering Code Example:
LIGUA 1 - WH - 40 - 80 - FR - 31W152


Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version




Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- LIGUA 1 aluminium profile system ideal for linear LED lighting applications.
- Variety of accessories for different corner and line extensions.
- Special design and construction to meet the most demanding lighting designs.
- Available with different CCT to meet all the architectural needs.
- L70 50.000h
- IP30

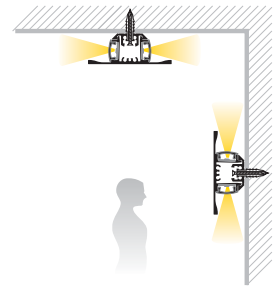

LIGHTSOURCE BY
NICHIA

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
LIGUA 2 (LIGUA 2)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(CL) Clear	(14W035) 14W / 35cm	24VDC (24)
		(25) 2500K		(OP) Opal	(24W060) 24.4W / 60cm	
		(27) 2700K		(FR) Frosted	(38W093) 38.5W / 93cm	
		(30) 3000K			(42W102) 42W / 102cm	
		(40) 4000K			(49W119) 49W / 119cm	
		(40) 4000K			(63W152) 63W / 152cm	
		(57) 5700K			(84W202) 84W / 202cm	

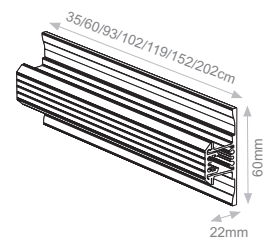

Ordering Code Example:
LIGUA 2 - WH - 40 - 80 - FR - 63W152

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



ARTTUBE

Interior Linear 

Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- The ARTTUBE is an elegant series for wall washing applications.
- Available in 15° & 35°.
- Available in monochromatic LEDs.
- L70 50.000h
- IP40



LIGHTSOURCE BY
NICHIA



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle / Type	Watt / Length	Voltage
ARTTUBE (ARTTUBE)	(AN) Anodized	(20) 2000K	(80) ≥ 80	(15) 15°	(07W035) 7W / 35cm	(24) 24VDC
		(25) 2500K		(35) 35°	(12W060) 12.2W / 60cm	
		(27) 2700K		(ML) Milky	(17W085) 17.5W / 85cm	
		(30) 3000K		(TR) Transparent	(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:

ARTTUBE - AN - 30 - 80 - 15 - 42W202 - 24


Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

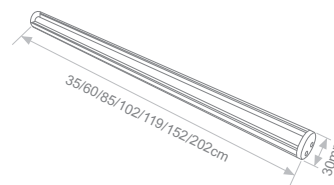

Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- The ARTTUBE is an elegant series for pendant applications.
- Available in monochromatic LEDs.
- L70 50.000h
- IP40

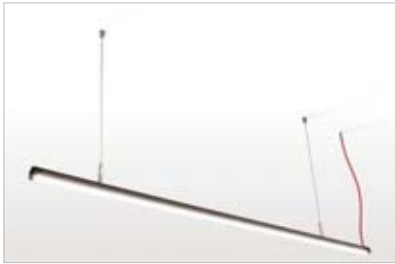

LIGHTSOURCE BY
NICHIA

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle / Type	Watt / Length	Voltage
ARTTUBE PENDANT (ARTTUBE PD)	(AN) Anodized	(20) 2000K	(80) ≥80	(15) 15° (35) 35° (ML) Milky (TR) Transparent	(07W035) 7W / 35cm	(24) 24VDC
		(25) 2500K			(12W060) 12.2W / 60cm	
		(27) 2700K			(17W085) 17.5W / 85cm	
		(30) 3000K			(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:
ARTTUBE PD - AN - 30 - 80 - 15 - 42W202 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

