


STAIR DUE




Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- Linear LED lighting available with milky, milky satin, ruled or transparent cover.
- Special design and construction to meet the most demanding lighting designs.
- L70 50.000h
- IP30

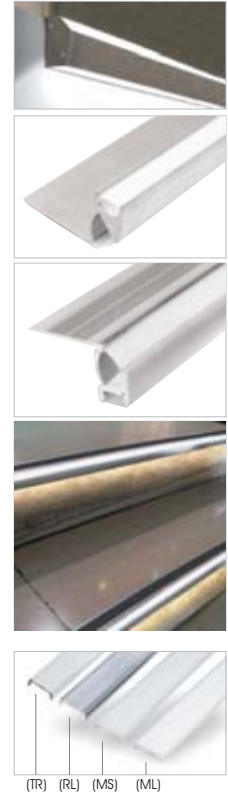

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
STAIR DUE <i>(STAIR DUE)</i>	Anodized Black <i>(AB)</i>	<i>(20)</i> 2000K	<i>(80)</i> ≥ 80	<i>(ML)</i> Milky	<i>(14W035)</i> 14W / 35cm	24VDC <i>(24)</i>
		<i>(25)</i> 2500K		<i>(MS)</i> Milky Satin	<i>(24W060)</i> 24.4W / 60cm	
		<i>(27)</i> 2700K		<i>(RL)</i> Ruled	<i>(38W093)</i> 38.5W / 93cm	
		<i>(30)</i> 3000K		<i>(TR)</i> Transparent	<i>(42W102)</i> 42W / 102cm	
		<i>(40)</i> 4000K			<i>(49W119)</i> 49W / 119cm	
	Anodized Silver <i>(AS)</i>	<i>(57)</i> 5700K			<i>(63W152)</i> 63W / 152cm	
					<i>(84W202)</i> 84W / 202cm	



Ordering Code Example:
STAIR DUE - AB - 27 - 80 - MS - 63W152 - 24

IP66 Available upon request

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

