




# TETRA PLUS TUNABLE



- Linear LED lighting surface, with hinge, recessed, trimless or pendant.
- Linear Tunable White system with adjustable colour temperature from 3,000 to 6,000 K at constant luminous flux.
- Low tolerances for colour temperature (MacAdam 4).
- Lumen maintenance L80/B50 50.000h
- IP30

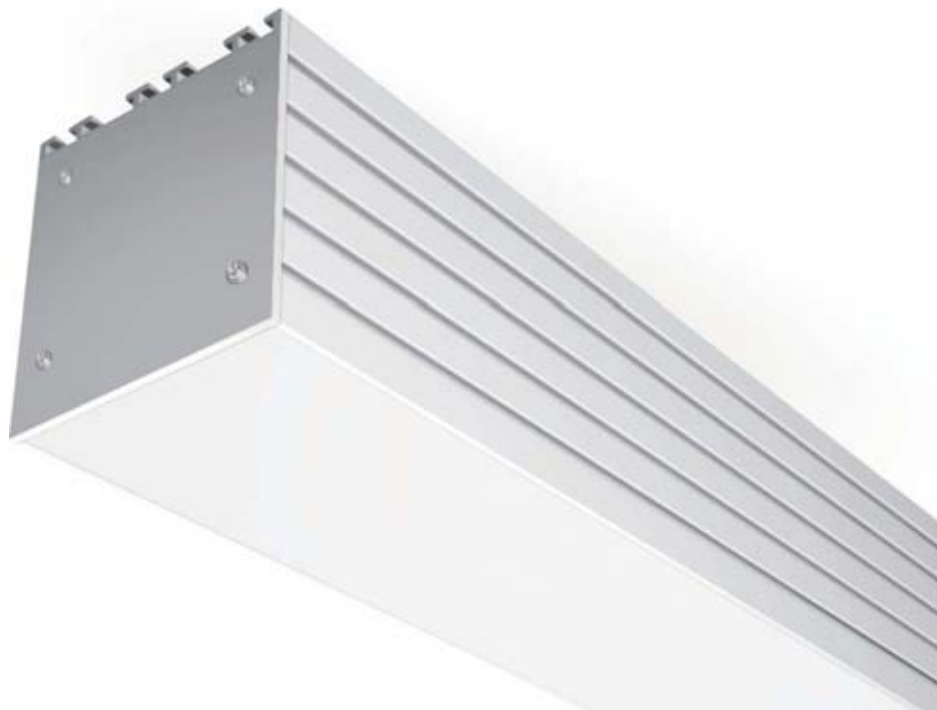


Model	Luminaire Colour	Colour Temperature	CRI	Type	Watt / Length / Initial LED Lumen (no cover)	Voltage
<b>TETRA PLUS TUNABLE SURFACE</b> (TETRA PLUS TS)						
<b>TETRA PLUS TUNABLE SURFACE with HINGE</b> (TETRA PLUS TH)						
<b>TETRA PLUS TUNABLE RECESSED</b> (TETRA PLUS TR)	(AN) Anodized (WH) White (BL) Black	(AD) 3000-6000K Adjustable	(80) ≥80	(TR) Transparent  (MS) Milky Satin	(20W086) 20W / 86cm / 2100lm (26W114) 26W / 114cm / 2650lm (32W142) 32W / 142cm / 3350lm (40W086) 40W / 86cm / 4300lm (52W114) 52W / 114cm / 5700lm (62W142) 62W / 142cm / 7150lm	(230) 230VAC DALI DIMMABLE
<b>TETRA PLUS TUNABLE TRIMLESS</b> (TETRA PLUS TT)						
<b>TETRA PLUS TUNABLE PENDANT</b> (TETRA PLUS TP)						





Ordering Code Example:  
TETRA PLUS TR - AN - AD - 80 - MS - 40W086 - 230

# TETRA PLUS TUNABLE EMERGENCY

- Linear LED lighting surface, with hinge, recessed, trimless or pendant.
- Linear Tunable White system with adjustable colour temperature from 3,000 to 6,000 K at constant luminous flux.
- Low tolerances for colour temperature (MacAdam 4)
- Lumen maintenance L80/B50 50.000h
- 3 hours EMERGENCY operation
- IP30

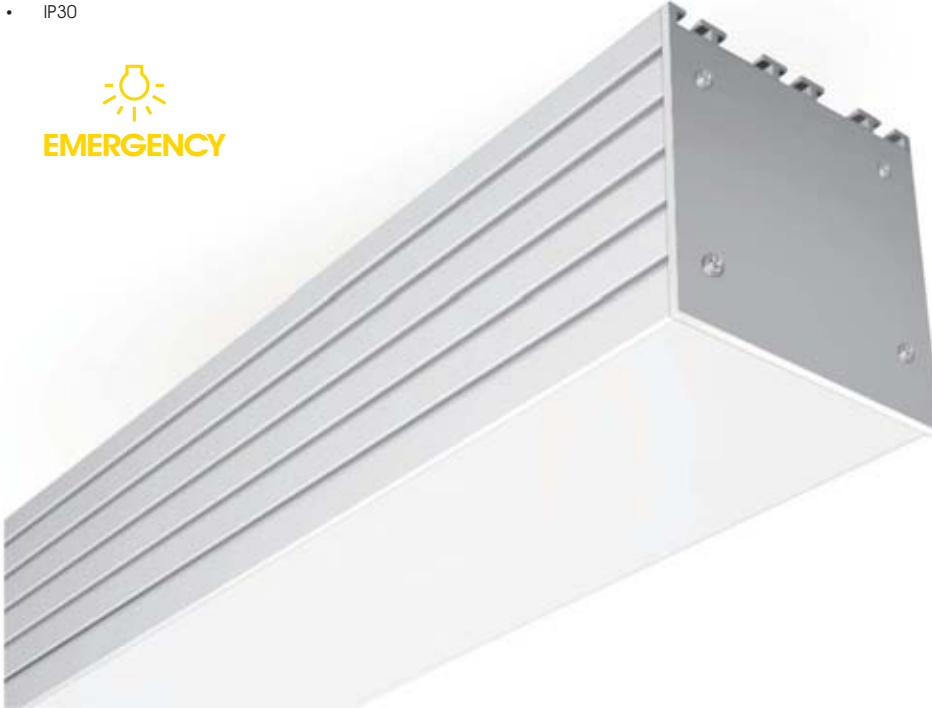

Model	Luminaire Colour	Colour Temperature	CRI	Type	Watt / Length /	Initial LED Lumen (no cover)	Voltage
<b>TETRA PLUS TUNABLE EM SURFACE</b> <i>(TETRA PLUS EM TS)</i>							
<b>TETRA PLUS TUNABLE EM SURFACE with HINGE</b> <i>(TETRA PLUS EM TH)</i>							
<b>TETRA PLUS TUNABLE EM RECESSED</b> <i>(TETRA PLUS EM TR)</i>	<i>(AN)</i> Anodized <i>(WH)</i> White <i>(BL)</i> Black	<i>(AD)</i> 3000-6000K Adjustable	<i>(80)</i> ≥ 80	<i>(TR)</i> Transparent <i>(MS)</i> Milky Satin	<i>(32W142)</i> 32W / 142cm / <i>(62W142)</i> 62W / 142cm /	3350lm 7150lm	<i>(230)</i> 230VAC DALI DIMMABLE
<b>TETRA PLUS TUNABLE EM TRIMLESS</b> <i>(TETRA PLUS EM TT)</i>							
<b>TETRA PLUS TUNABLE EM PENDANT</b> <i>(TETRA PLUS EM TP)</i>							









Ordering Code Example:  
TETRA PLUS EM TR - AN - AD - 80 - MS - 62W142 - 230

# TETRA PLUS



- Linear LED lighting surface, with hinge, recessed, trimless or pendant.
- IP30

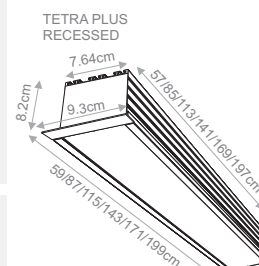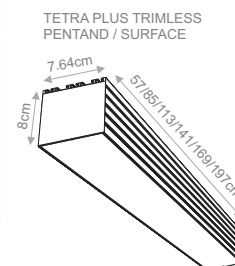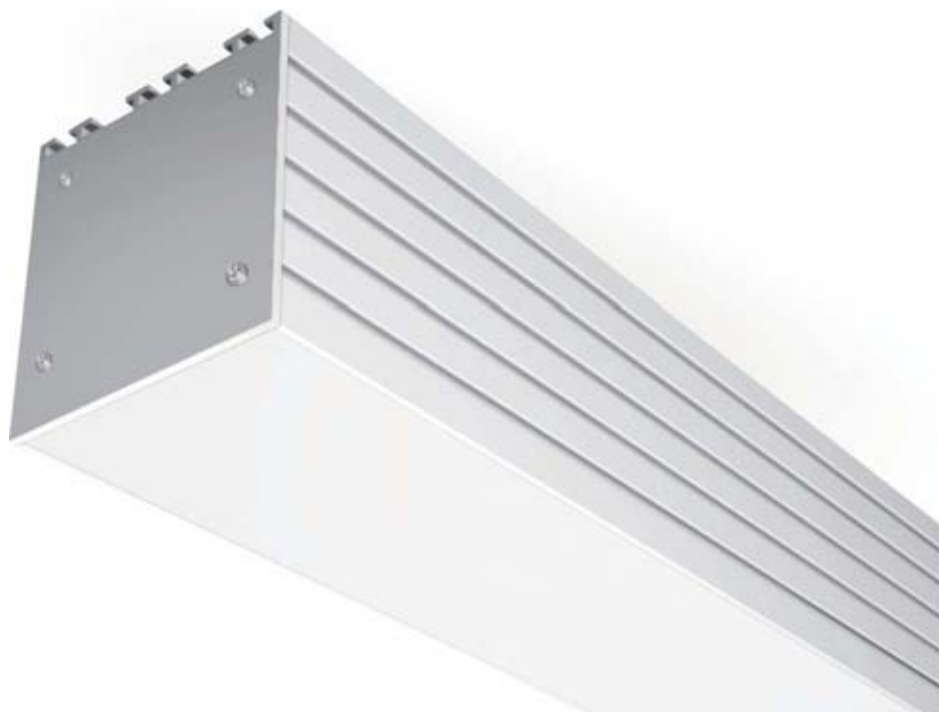

- 578 x 81mm
- 858 x 81mm
- 1138 x 81mm
- 1418 x 81mm
- 1698 x 81mm
- 1978 x 81mm

Model	Luminaire Colour	CRI	Type	Voltage	Colour Temperature*	Watt / Length / Initial LED Lumen (no cover)
<b>TETRA PLUS SURFACE</b> (TETRA PLUS SF)					[30] 3000K	(16W057) 16W / 57cm / 2060lm
						(24W085) 24W / 85cm / 3090lm
						(32W113) 32W / 113cm / 4120lm
						(40W141) 40W / 141cm / 5150lm
						(48W169) 48W / 169cm / 6180lm
<b>TETRA PLUS SURFACE with HINGE</b> (TETRA PLUS SH)						(56W197) 56W / 197cm / 7210lm
<b>TETRA PLUS RECESSED</b> (TETRA PLUS RC)	[AN] Anodized [WH] White [BL] Black	[80] ≥ 80	[TR] Transparent [MS] Milky Satin	[230] 230VAC	[40] 4000K	(16W057) 16W / 57cm / 2240lm
						(24W085) 24W / 85cm / 3360lm
						(32W113) 32W / 113cm / 4480lm
						(40W141) 40W / 141cm / 5600lm
						(48W169) 48W / 169cm / 6720lm
<b>TETRA PLUS TRIMLESS</b> (TETRA PLUS TR)						(56W197) 56W / 197cm / 7840lm
<b>TETRA PLUS PENDANT</b> (TETRA PLUS PD)						

\*Available in 2700K, 3500K and 6500K upon request.  
\*\*Available in 230VAC DALI dimmable upon request.

Ordering Code Example:


TETRA PLUS RC - AN - 80 - TR - 230 - 40 - 32W113

### Available upon request:



- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

# TETRA PLUS 230V EMERGENCY




- 3 hours EMERGENCY operation
- Surface, Recessed, Trimless or Pendant.
- DALI dimmable upon request (except 32W113 model).
- Low tolerances for colour temperature (MacAdam 4)
- Lumen maintenance L80/B50 50.000h
- IP30

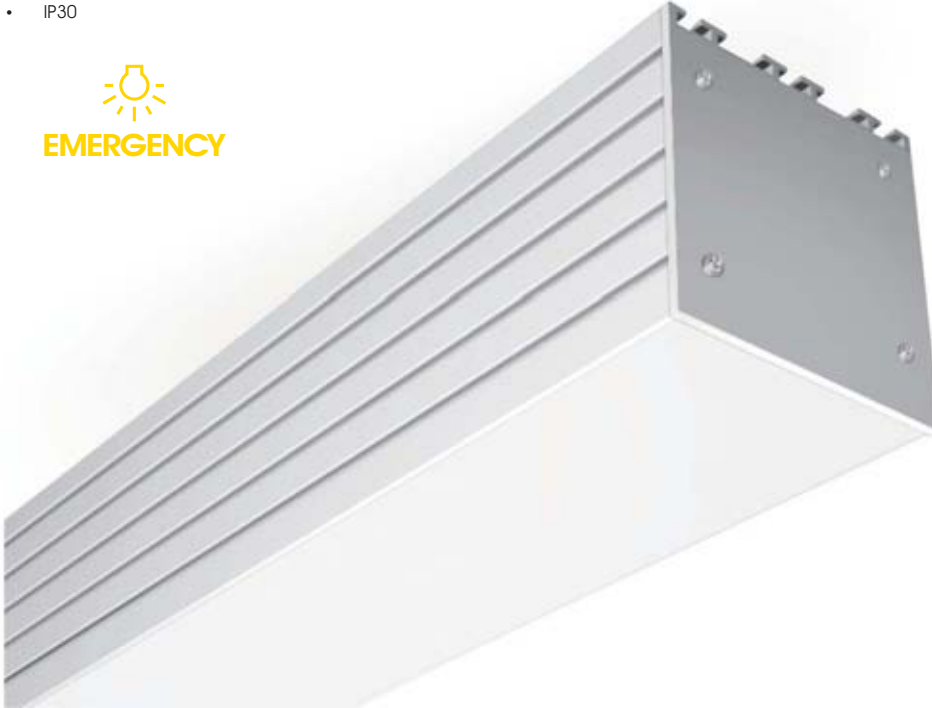

TETRA PLUS EM TRIMLESS PENTAND / SURFACE



TETRA PLUS EM RECESSED

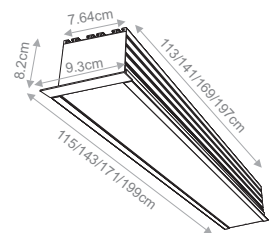

- 1138 x 81mm
- 1418 x 81mm
- 1698 x 81mm
- 1978 x 81mm

Model	Luminaire Colour	CRI	Type	Voltage	Colour Temperature*	Watt / Length / Initial LED Lumen (no cover)
<b>TETRA PLUS EM SURFACE</b> (TETRA PLUS EM SF)					{ (30) 3000K	{ (32W113) 32W / 113cm / 4120lm (40W141) 40W / 141cm / 5150lm (48W169) 48W / 169cm / 6180lm (56W197) 56W / 197cm / 7210lm
<b>TETRA PLUS EM SURFACE with HINGE</b> (TETRA PLUS EM SH)						
<b>TETRA PLUS EM RECESSED</b> (TETRA PLUS EM RC)	(AN) Anodized (WH) White (BL) Black	{ (80) ≥ 80	{ (TR) Transparent (MS) Milky Satin	{ (230) 230VAC	{ (40) 4000K	{ (32W113) 32W / 113cm / 4480lm (40W141) 40W / 141cm / 5600lm (48W169) 48W / 169cm / 6720lm (56W197) 56W / 197cm / 7840lm
<b>TETRA PLUS EM TRIMLESS</b> (TETRA PLUS EM TR)						
<b>TETRA PLUS EM PENDANT</b> (TETRA PLUS EM PD)						

\*Available in 2700K, 3500K and 6500K upon request.

Ordering Code Example:

TETRA PLUS EM RC - AN - 80 - TR - 230 - 40 - 40W141

**Monochromatic:** Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- Linear LED lighting with CREE LEDs.
- Available in different CCT.
- Available in recessed, trimless, surface, wall adjustable or pendant application.
- IP30



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt-LED/m	Length	Voltage
TETRA WASH SURFACE A (TETRA WASH SA)						(032) 32cm	[24] 24VDC
						(052) 52cm	
TETRA WASH SURFACE B (TETRA WASH SB)	(AN) Anodized	(27) 2700K	[70] ≥ 70*	[12] 12°		(1010) 10.5W-10LED/m	
	(WH) White	(30) 3000K				(2010) 21W-10LED/m	
TETRA WASH SURFACE C (TETRA WASH SC)	(BL) Black	(40) 4000K	[80] ≥ 80**	[25] 25°		(2020) 21W-20LED/m	
		(56) 5600K*		[46] 46°		(112) 112cm	
				[40] 40°x10°		(122) 122cm	
						(132) 132cm	
						(142) 142cm	
						(152) 152cm	
						(162) 162cm	
						(172) 172cm	
						(182) 182cm	
						(192) 192cm	
						(202) 202cm	
					(2424) 25.2W-24LED/m	(052) 52cm	
						(102) 102cm	
						(152) 152cm	
						(202) 202cm	

\* 5600K only available in CRI 70  
\*\* CRI 80 only for 2700K/3000K/4000K


**Available upon request:**

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

Ordering Code Example:  
TETRA WASH SC - WH - 30 - 80 - 46 - 2424 - 102 - 24





Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt-LED/m	Length	Voltage				
<b>TETRA WASH RECESSED</b> <i>(TETRA WASH RC)</i>	<i>(AN)</i> Anodized <i>(WH)</i> White <i>(BL)</i> Black	<i>(27)</i> 2700K <i>(30)</i> 3000K <i>(40)</i> 4000K <i>(56)</i> 5600K*	<i>(70)</i> ≥ 70* <i>(80)</i> ≥ 80**	<i>(12)</i> 12° <i>(25)</i> 25° <i>(46)</i> 46° <i>(40)</i> 40°x10°	<i>(1010)</i> 10.5W-10LED/m <i>(2010)</i> 21W-10LED/m <i>(2020)</i> 21W-20LED/m	<i>(034)</i> 34cm	<i>(24)</i> 24VDC				
						<i>(054)</i> 54cm					
						<i>(064)</i> 64cm					
						<i>(084)</i> 84cm					
						<i>(094)</i> 94cm					
						<i>(104)</i> 104cm					
						<i>(114)</i> 114cm					
						<i>(124)</i> 124cm					
						<i>(134)</i> 134cm					
						<i>(144)</i> 144cm					
						<i>(154)</i> 154cm					
						<i>(164)</i> 164cm					
						<i>(174)</i> 174cm					
						<i>(184)</i> 184cm					
						<i>(194)</i> 194cm					
						<i>(204)</i> 204cm					
						<i>(2424)</i> 25.2W-24LED/m		<i>(054)</i> 54cm	<i>(104)</i> 104cm	<i>(154)</i> 154cm	<i>(204)</i> 204cm



- 32.2x4.3cm
- 52.2x4.3cm
- 62.2x4.3cm
- 82.2x4.3cm
- 92.2x4.3cm
- 102.2x4.3cm
- 112.2x4.3cm
- 122.2x4.3cm
- 132.2x4.3cm
- 142.2x4.3cm
- 152.2x4.3cm
- 162.2x4.3cm
- 172.2x4.3cm
- 182.2x4.3cm
- 192.2x4.3cm
- 202.2x4.3cm

\* 5600K only available in CRI 70  
\*\* CRI 80 only for 2700K/3000K/4000K

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt-LED/m	Length	Voltage				
<b>TETRA WASH TRIMLESS</b> <i>(TETRA WASH TR)</i>	<i>(AN)</i> Anodized <i>(WH)</i> White <i>(BL)</i> Black	<i>(27)</i> 2700K <i>(30)</i> 3000K <i>(40)</i> 4000K <i>(56)</i> 5600K*	<i>(70)</i> ≥ 70* <i>(80)</i> ≥ 80**	<i>(12)</i> 12° <i>(25)</i> 25° <i>(46)</i> 46° <i>(40)</i> 40°x10°	<i>(1010)</i> 10.5W-10LED/m <i>(2010)</i> 21W-10LED/m <i>(2020)</i> 21W-20LED/m	<i>(032)</i> 32cm	<i>(24)</i> 24VDC				
						<i>(052)</i> 52cm					
						<i>(062)</i> 62cm					
						<i>(082)</i> 82cm					
						<i>(092)</i> 92cm					
						<i>(102)</i> 102cm					
						<i>(112)</i> 112cm					
						<i>(122)</i> 122cm					
						<i>(132)</i> 132cm					
						<i>(142)</i> 142cm					
						<i>(152)</i> 152cm					
						<i>(162)</i> 162cm					
						<i>(172)</i> 172cm					
						<i>(182)</i> 182cm					
						<i>(192)</i> 192cm					
						<i>(202)</i> 202cm					
						<i>(2424)</i> 25.2W-24LED/m		<i>(052)</i> 52cm	<i>(102)</i> 102cm	<i>(152)</i> 152cm	<i>(202)</i> 202cm



\* 5600K only available in CRI 70  
\*\* CRI 80 only for 2700K/3000K/4000K

**Available upon request:**

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version






Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt-LED/m	Length	Voltage
<b>TETRA WASH WALL ADJUSTABLE</b> (TETRA WASH WA)	(AN) Anodized (WH) White (BL) Black	(27) 2700K (30) 3000K (40) 4000K (56) 5600K*	(70) ≥ 70* (80) ≥ 80**	(12) 12° (25) 25° (46) 46° (40) 40°x10°	(1010) 10.5W -10LED/m (2010) 21W -10LED/m (2020) 21W -20LED/m	(032) 32cm	(24) 24VDC
						(052) 52cm	
						(062) 62cm	
						(082) 82cm	
						(092) 92cm	
						(102) 102cm	
						(112) 112cm	
						(122) 122cm	
						(132) 132cm	
						(142) 142cm	
						(152) 152cm	
						(162) 162cm	
						(172) 172cm	
						(182) 182cm	
(192) 192cm							
(202) 202cm							
					(2424) 25.2W -24LED/m	(052) 52cm (102) 102cm (152) 152cm (202) 202cm	



\* 5600K only available in CRI 70  
\*\* CRI 80 only for 2700K/3000K/4000K

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt-LED/m	Length	Voltage
<b>TETRA WASH PENDANT</b> (TETRA WASH PD)	(AN) Anodized (WH) White (BL) Black	(27) 2700K (30) 3000K (40) 4000K (56) 5600K*	(70) ≥ 70* (80) ≥ 80**	(12) 12° (25) 25° (46) 46° (40) 40°x10°	(1010) 10.5W -10LED/m (2010) 21W -10LED/m (2020) 21W -20LED/m	(032) 32cm	(24) 24VDC
						(052) 52cm	
						(062) 62cm	
						(082) 82cm	
						(092) 92cm	
						(102) 102cm	
						(112) 112cm	
						(122) 122cm	
						(132) 132cm	
						(142) 142cm	
						(152) 152cm	
						(162) 162cm	
						(172) 172cm	
						(182) 182cm	
(192) 192cm							
(202) 202cm							
					(2424) 25.2W -24LED/m	(052) 52cm (102) 102cm (152) 152cm (202) 202cm	

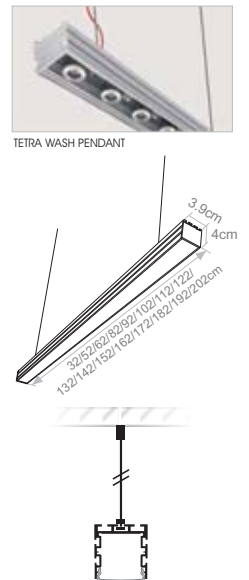

\* 5600K only available in CRI 70  
\*\* CRI 80 only for 2700K/3000K/4000K

**Available upon request:**

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version





# TETRA RECESSED + TRIMLESS



## Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- Linear LED lighting with transparent or milky cover.
- Available in recessed or trimless application.
- Available in different CCT to meet all the architectural needs.
- L70 50.000h
- IP30





TETRA RECESSED



TETRA TRIMLESS

LIGHTSOURCE BY  
**NICHIA**

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
<b>TETRA RECESSED</b> (TETRA RC)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(TR) Transparent	(12W062) 12.2W / 62cm	24VDC (24)
		(25) 2500K		(MS) Milky Satin	(24W062) 24.4W / 62cm	
		(27) 2700K		(19W095) 19.2W / 95cm		
		(30) 3000K		(38W095) 38.5W / 95cm		
		(40) 4000K		(21W104) 21W / 104cm		
		(57) 5700K		(42W104) 42W / 104cm		
				(24W121) 24.5W / 121cm		
				(49W121) 49W / 121cm		
				(31W154) 31.5W / 154cm		
				(63W154) 63W / 154cm		
				(42W204) 42W / 204cm		
				(84W204) 84W / 204cm		
		<b>TETRA TRIMLESS</b> (TETRA TR)		(AN) Anodized (WH) White (BL) Black	(20) 2000K	
(25) 2500K	(MS) Milky Satin		(24W060) 24.5W / 60cm			
(27) 2700K	(19W093) 19.25W / 93cm					
(30) 3000K	(38W093) 38.5W / 93cm					
(40) 4000K	(21W102) 21W / 102cm					
(57) 5700K	(42W102) 42W / 102cm					
	(24W119) 24.5W / 119cm					
	(49W119) 49W / 119cm					
	(31W152) 31.5W / 152cm					
	(63W152) 63W / 152cm					
	(42W202) 42W / 202cm					
	(84W202) 84W / 202cm					

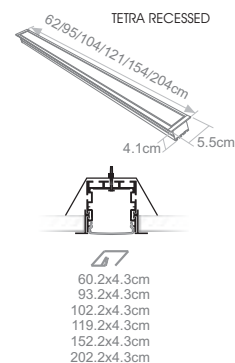

Ordering Code Example:  
TETRA RC - WH - 30 - 80 - MS - 49W121 - 24

### Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version





# TETRA SEMI RECESSED

**Monochromatic:** Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- Linear LED lighting with transparent or milky satin cover.
- Available with different CCT to meet all the architectural needs.
- Semi recessed effect.
- L70 50.000h
- IP30





Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
<b>TETRA SEMI RECESSED</b> (TETRA SR)	(AN) Anodized	(20) 2000K	(80) ≥ 80	(TR) Transparent (MS) Milky Satin	(12W062) 12.2W / 62cm	24VDC (24)
		(25) 2500K			(24W062) 24.4W / 62cm	
		(27) 2700K			(19W095) 19.2W / 95cm	
	(WH) White	(30) 3000K			(38W095) 38.5W / 95cm	
		(40) 4000K			(21W104) 21W / 104cm	
		(57) 5700K			(42W104) 42W / 104cm	
		(24W121) 24.5W / 121cm				
		(49W121) 49W / 121cm				
		(31W154) 31.5W / 154cm				
		(63W154) 63W / 154cm				
	(BL) Black	(42W204) 42W / 204cm				
		(84W204) 84W / 204cm				

Ordering Code Example:

TETRA SR - AN - 30 - 80 - MS - 21W104 - 24

**Available upon request:**

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



- 60.2x4.3cm
- 93.2x4.3cm
- 102.2x4.3cm
- 119.2x4.3cm
- 152.2x4.3cm
- 202.2x4.3cm

# TETRA SURFACE



## Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- Linear LED lighting with transparent or milky satin cover.
- Available with different CCT to meet all the architectural needs.
- Available in 3 different types.
- L70 50.000h
- IP30



TETRA SURFACE A







TETRA SURFACE B



TETRA SURFACE C



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
<b>TETRA SURFACE A</b> (TETRA SA)		(20) 2000K	(80) ≥ 80	(TR) Transparent (MS) Milky Satin	(12W060) 12.2W / 60cm	24VDC (24)
		(25) 2500K			(24W060) 24.5W / 60cm	
		(27) 2700K			(19W093) 19.25W / 93cm	
		(30) 3000K			(38W093) 38.5W / 93cm	
<b>TETRA SURFACE B</b> (TETRA SB)	(AN) Anodized	(40) 4000K			(21W102) 21W / 102cm	
	(WH) White	(42W102) 42W / 102cm				
	(BL) Black	(24W119) 24.5W / 119cm				
<b>TETRA SURFACE C</b> (TETRA SC)		(57) 5700K			(49W119) 49W / 119cm	
					(31W152) 31.5W / 152cm	
					(63W152) 63W / 152cm	
					(42W202) 42W / 202cm	
		(84W202) 84W / 202cm				



Ordering Code Example:

TETRA SB - WH - 30 - 80 - MS - 63W152 - 24

### Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

**Monochromatic:** Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- Pendant linear LED with transparent or milky satin cover.
- Available with different CCT to meet all the architectural needs.
- L70 50,000h
- IP30



LIGHTSOURCE BY  
**NICHIA**

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
TETRA PENDANT (TETRA PD)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(TR) Transparent (MS) Milky Satin	(12W060) 12.2W / 60cm	24VDC (24)
		(25) 2500K			(24W060) 24.5W / 60cm	
		(27) 2700K			(19W093) 19.25W / 93cm	
		(30) 3000K			(38W093) 38.5W / 93cm	
		(40) 4000K			(21W102) 21W / 102cm	
		(57) 5700K			(42W102) 42W / 102cm	
		(24W119) 24.5W / 119cm				
		(49W119) 49W / 119cm				
		(31W152) 31.5W / 152cm				
		(63W152) 63W / 152cm				
		(42W202) 42W / 202cm				
		(84W202) 84W / 202cm				

Ordering Code Example:

TETRA PD - WH - 30 - 80 - MS - 63W152 - 24

**Available upon request:**

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

