

U TYPE



Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- Linear LED lighting available with milky, milky satin, ruled or transparent cover.
- Special design and construction to meet the most demanding lighting designs.
- L70 50.000h
- IP40




Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
U TYPE (U TYPE)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(ML) Milky	(07W035) 7W / 35cm	24VDC (24)
		(25) 2500K		(MS) Milky Satin	(12W060) 12.2W / 60cm	
		(27) 2700K		(RL) Ruled	(17W085) 17.5W / 85cm	
		(30) 3000K		(TR) Transparent	(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:

U TYPE - AN - 40 - 80 - MS - 31W152 - 24


Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

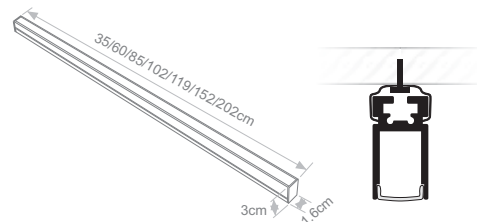

Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.
- Linear LED lighting available with milky, milky satin, ruled or transparent cover.
- Special design and construction to meet the most demanding lighting designs.
- L70 50,000h
- IP40



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
U TYPE PENDANT (U TYPE PD)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(ML) Milky	(07W035) 7W / 35cm	24VDC (24)
		(25) 2500K		(MS) Milky Satin	(12W060) 12.2W / 60cm	
		(27) 2700K		(RL) Ruled	(17W085) 17.5W / 85cm	
		(30) 3000K		(TR) Transparent	(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:

U TYPE PD - AN - 40 - 80 - MS - 31W152 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

