

- Clear cutting edge and sharp gobo image, can create projection effect.
- Lumen output: 420lm
- For indoor use only.
- Weight: 1,7 Kgs
- Ideal to use in Museums, Art Galleries, Retail shops, Hotels etc.
- CREE LED




Gel media frame




Gobo holder

Code	Model	Colour Temperature	Colour Rendering	Colour	Wattage	Input Voltage	Dimming
THE.054	MINI PROFILE	3000K	>85	White	13W	120V-240VAC	10% up to 100%

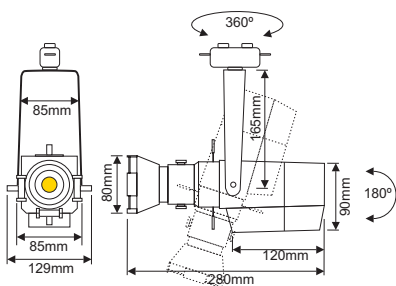


Accessories at additional cost




Gel media frame



Gobo holder



Glare-shield



Lens barrel
LNS.050 Lens 19
LNS.051 Lens 26
LNS.052 Lens 36

- 2-3 SDCM
- L70/B50 - 50.000h




LIGHTSOURCE BY
bridgelux.

Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option
LYRA 14.7W (LYRA15)	(27B1230) 2700K - 1230lm	Adjustable	(70) 70*	(16) 16°	(BL) Black	(ND) Non-Dimmable 230VAC
	(30B1340) 3000K - 1340lm		(80) 80	(40) 40°	(WH) White	
	(35B1420) 3500K - 1420lm		(90) 90**			
	(40B1500) 4000K - 1500lm					
	(50B1680) 5000K - 1680lm					
	(56B1680) 5600K - 1680lm					

* 5000K & 5600K only available in CRI 70
** CRI 90 only for 2700K & 3000K

Ordering Code Example:

LYRA15 - 27B1230 - AD - 90 - 16 - WH - ND

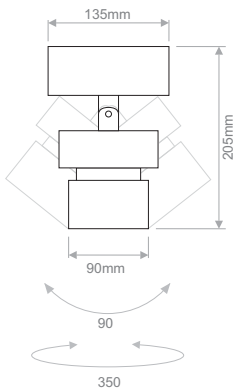



Interior Ceiling Surface

MORETTO

- 2-3 SDCM
- L70/B50 - 50.000h





LIGHTSOURCE BY
bridgelux.

Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option
MORETTO 10.3W (MORETTO 10)	(30B0845) 3000K - 845lm	(FX) Fixed	$\frac{(80) 80}{(90) 90}$	$\frac{(24) 24^\circ}{(32) 32^\circ}{(50) 50^\circ}$	$\frac{(BL) \text{ Black}}{(WH) \text{ White}}$	(ND) Non-Dimmable 230VAC

* Available also in 4000K and 5000K.

Ordering Code Example:

MORETTO 10 - 30B0845 - FX - 90 - 50 - WH - ND



- 2-3 SDCM
- L70/B50 - 50.000h




LIGHTSOURCE BY
bridgelux.


Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option
LACERTA 10.3W (LACERTA 10)	(27B0740) 2700K - 740lm	Adjustable	(70) 70*	(16) 16°	White / Black	(ND) Non-Dimmable 230VAC
	(30B0800) 3000K - 800lm		(80) 80	(28) 28°		
	(40B0895) 4000K - 895lm		(90) 90**	(40) 40°		
	(56B1000) 5600K - 1000lm					

* 5600K only available in CRI 70
** CRI 90 only for 2700K & 3000K

Ordering Code Example:
LACERTA 10 - 27B0740 - AD - 70 - 40 - WB - ND

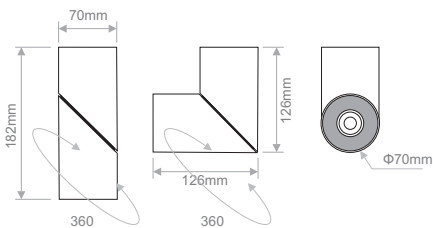

- 2-3 SDCM
- L70/B50 - 50.000h




LIGHTSOURCE BY
bridgelux.


Model	Colour Temperature	- LED Lumen /per LED	Type	Colour Rendering	Beam Angle	Colour***	Dimming Option
CARINA 10.3W (CARINA 10)	(27B0740)	2700K - 740lm per LED	Adjustable	(70) 70*	(16) 16°	White / Grey	(ND) Non-Dimmable 230VAC
	(30B0800)	3000K - 800lm per LED		(80) 80	(28) 28°		
CARINA 20.6W (CARINA 20)	(40B0895)	4000K - 895lm per LED		(90) 90**	(40) 40°		
	(56B1000)	5600K - 1000lm per LED					

* 5600K only available in CRI 70
** CRI 90 only for 2700K & 3000K
***Black/Gold colour available upon request

Ordering Code Example:
CARINA20 - 30B0800 - AD - 90 - 16 - BG - ND

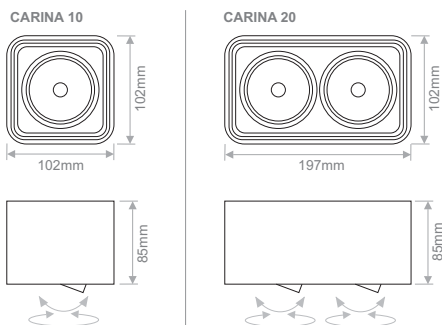

BRUCIA

Interior Ceiling Surface 

- 2-3 SDCM
- L70/B50 - 50.000h



LIGHTSOURCE BY
bridgelux

Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour***	Dimming Option
BRUCIA L10.3W (BRUCIA L10)	(27B0740) 2700K - 740lm	(FX) Fixed	(70) 70*	(16) 16°	(BO) Black / Orange	(ND) Non-Dimmable 230VAC
	(30B0800) 3000K - 800lm		(80) 80	(28) 28°		
	(40B0895) 4000K - 895lm		(90) 90**	(40) 40°		
	(56B1000) 5600K - 1000lm					
BRUCIA M10.3W (BRUCIA M10)	(27B0740) 2700K - 740lm	(FX) Fixed	(70) 70*	(16) 16°	(BO) Black / Orange	(ND) Non-Dimmable 500mA
	(30B0800) 3000K - 800lm		(80) 80	(28) 28°		
	(40B0895) 4000K - 895lm		(90) 90**	(40) 40°		
	(56B1000) 5600K - 1000lm					
BRUCIA S10.3W (BRUCIA S10)	(27B0740) 2700K - 740lm	(FX) Fixed	(70) 70*	(16) 16°	(WW) White / White	(ND) Non-Dimmable 500mA
	(30B0800) 3000K - 800lm		(80) 80	(28) 28°		
	(40B0895) 4000K - 895lm		(90) 90**	(40) 40°		
	(56B1000) 5600K - 1000lm					
BRUCIA S FLAT 10.3W (BRUCIA SF10)	(27B0740) 2700K - 740lm	(FX) Fixed	(70) 70*	(16) 16°	(WW) White / White	(ND) Non-Dimmable 500mA
	(30B0800) 3000K - 800lm		(80) 80	(28) 28°		
	(40B0895) 4000K - 895lm		(90) 90**	(40) 40°		
	(56B1000) 5600K - 1000lm					


* 5600K only available in CRI 70

** CRI 90 only for 2700K & 3000K

***BRUCIA L, M & S also available in White/Black & Black/White upon request,
BRUCIA S also available in White/White,
BRUCIA S FLAT available only in White/White

Ordering Code Example:

BRUCIA S10 - 56B1000 - FX - 70 - 40 - WW - ND

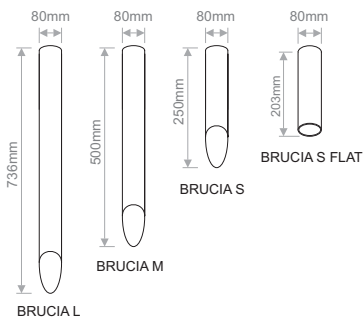



VERONA SF

- 2-3 SDCM
- L70/B50 - 50.000h
- IP20




Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option
VERONA SURFACE 6W <i>(VERONA SF 06)</i>	<i>(27B0666)</i> 2700K - 666lm	<i>(AD)</i> Adjustable	<i>(90)</i> 90	<i>(18)</i> 18° <i>(32)</i> 32°	<i>(WH)</i> White	<i>(ND)</i> Non-Dimmable 230VAC
	<i>(30B0703)</i> 3000K - 703lm					
	<i>(35B0723)</i> 3500K - 723lm					
	<i>(40B0749)</i> 4000K - 749lm					
	<i>(50B0751)</i> 5000K - 751lm					





- Emergency version upon request


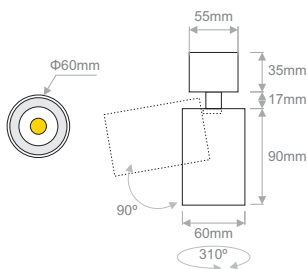
Ordering Code Example:

VERONA SF 06 - 40B0749 - AD - 90 - 18 - WH - ND







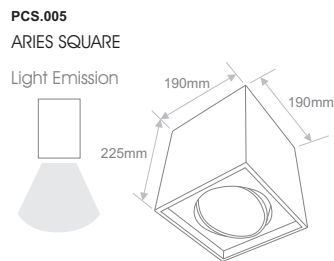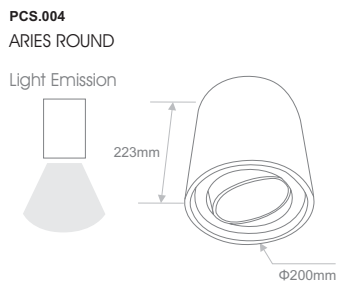

Code	Model	Lamp Holder	Maximum Consumption	Voltage			IP 	
PCS.004	ARIES ROUND	AR111	100W	12VAC	Not included	3.4Kg	IP20	
PCS.005	ARIES SQUARE	AR111	100W	12VAC	Not included	4.5Kg	IP20	






Code	Model	Lamp Holder	Maximum Consumption	Voltage			IP 	
PCS.001	BAREL ROUND	Gx5.3	35W	12VAC	Not included	1.2Kg	IP20	
PCS.002	BAREL SQUARE	Gx5.3	35W	12VAC	Not included	1.6Kg	IP20	


PCS.001
BAREL ROUND

Light Emission

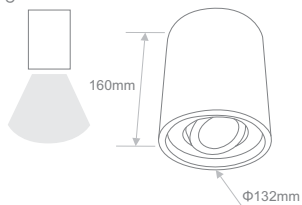




PCS.002
BAREL SQUARE

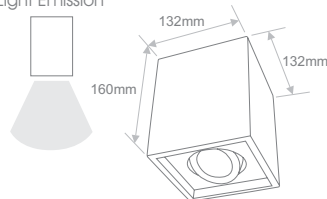Light Emission





Code	Model	Lamp Holder	Maximum Consumption	Voltage			IP 
PCS.003	ATLAS	GU10	35W	220-240VAC	Not included	1.98Kg	IP20



PCS.003
ATLAS

Light Emission

