

108LED/m COLORI RGB

Flexible LEDs 



RGB: Management through:

- DMX 512 controllers.
 - Wireless IR & RF control units.
 - DALI Protocol devices.
-
- Ideal for concealed lighting.
 - Installation in linear and non-linear applications.
 - Ease of use.
 - 50m reel.



Code	No.LED	Colour	Watt	Dimensions	Reel	Tube	Voltage		 *	IP 
TIV.026 /CC	108/m (36per colour)	RGB	5.5W/m	10x22mm	50m	TRANSPARENT	24VDC	45°	170mm	IP65
TIV.027 /CC	108/m (36per colour)	RGB	5.5W/m	10x22mm	50m	MILKY	24VDC	120°	250mm	IP65
TIV.029 /CC	108/m (36per colour)	RGB	5.5W/m	10x22mm	50m	TRANSPARENT	24VDC	120°	170mm	IP65

* Please confirm with the ≧< sign on the rear side of the modules



ACC.036 Holder






ACC.028 Supply connector

36LED/m POINTER LED Monochromatic



- **Monochromatic:** Management through:
- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.



Code	No.LED	Colour	Watt	Dimensions	Reel	Voltage		 *	IP 
<i>TRANSPARENT</i>									
TIV.109	36/m	COOL WHITE	2W/m	6x9mm	100m	24VDC	60°	170mm	IP65
TIV.110	36/m	AMBER	1.5W/m	6x9mm	100m	24VDC	60°	250mm	IP65
TIV.111	36/m	WARM WHITE	1.9W/m	6x9mm	100m	24VDC	60°	170mm	IP65

* Please confirm with the ≧< sign on the rear side of the modules

Can be used with aluminium channel



ACC.029 Supply connector/ end cap



ACC.030 (2m) ACC.046 (1m) Aluminium channel





Flexible LEDs

36LED/m ROPE LED

Monochromatic


- **Monochromatic:** Management through:
 - DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
 - Wireless IR & RF control units.
 - DALI Protocol devices.



Code	No.LED	Colour	Watt	Diameter	Reel	Voltage				IP
TIV.006	36/m	BLUE	1.8W/m	13mm	100m	24VDC		330°	170mm	IP65
TIV.009	36/m	COOL WHITE	2W/m	13mm	100m	24VDC		330°	170mm	IP65
TIV.010	36/m	AMBER	1.8W/m	13mm	100m	24VDC		330°	170mm	IP65

Flexible tube ROPE
Ideal for decorative lighting

* Please confirm with the \approx sign on the rear side of the modules.
 **Connectors are NOT IP protected.
 ***Special attention in installation

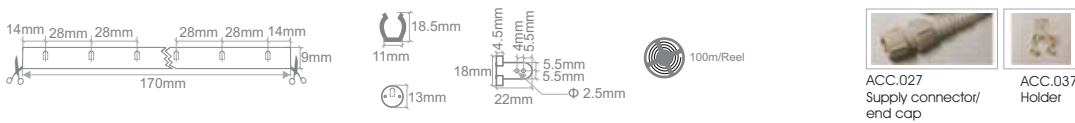

36LED/m SIDE+ROUND+RECTANGULAR SLIM LED

Monochromatic

- **Monochromatic:** Management through:
 - DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
 - Wireless IR & RF control units.
 - DALI Protocol devices.
- Available in side-lit, round or rectangular form



Code	No.LED	Colour	Watt	Dimensions	Reel	Voltage				IP
<i>SIDE</i>										
TIV.124	36/m	BLUE	2.6W/m	2.2x8mm	10m	24VDC		120°	every 6 LEDs	IP65
TIV.127	36/m	COOL WHITE	2.6W/m	2.2x8mm	10m	24VDC		120°	every 6 LEDs	IP65
<i>ROUND</i>										
TIV.132	36/m	COOL WHITE	2.6W/m	Φ 5.5mm	10m	24VDC		120°	every 6 LEDs	IP65
<i>RECTANGULAR</i>										
TIV.134	36/m	BLUE	2.6W/m	3.5x5mm	10m	24VDC		120°	every 6 LEDs	IP65

* Please confirm with the \approx sign on the rear side of the modules.

