

Ra 90+

# 60LED/m LED Strip CRI90+

**LED SOURCE**  
60 LEDs BY SAMSUNG

**COLOUR RENDERING INDEX**  
90+


**LUMEN EFFICACY**  
1750 lm/m

**DIFFERENT CCTs**  
Upon request

**TECHNICAL CHARACTERISTICS**  
Operating Voltage: 24VDC  
Power Consumption: 20W/m  
Viewing Angle: 120°  
Cutting Point: every 10cm  
Ingress Protection: IP20

**PACKAGING**  
1x5m/Reel  
Total 5meters/Reel

**INSTALLATION**  
IDEAL USE OF SUITABLE  
ELECTRON PROFILES

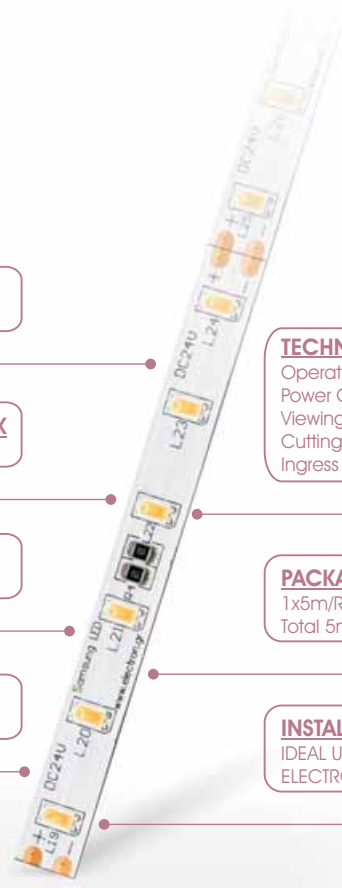

LIGHTSOURCE BY  
**SAMSUNG**

Ra 90 L70/B36 36.000h

- Monochromatic:** Management through:
- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
  - Wireless IR & RF control units.
  - DALI Protocol devices.
- This series has high CRI and high lumen efficacy.
  - It should be used only with appropriate heat sink (ELECTRON Aluminium Profiles) for heat absorption & maintenance issues.
  - It is offered with adhesive tape on the rear side.
  - Different CCTs available upon request.



Code	No.LED	Colour*	Watt	Dimensions	Reel	Colour Temperature /CRI	Luminus FLUX (LM)	Voltage	Viewing Angle	Cutting Point**	IP
TIV.324	60/m	WARM WHITE	20W/m	10x1.5mm	5m	3000K / CRI90+	1750 lm/m	24VDC	120°	100mm	IP20
TIV.326	60/m	NEUTRAL WHITE	20W/m	10x1.5mm	5m	4000K / CRI90+	1950 lm/m	24VDC	120°	100mm	IP20

\* Available in other colours upon request  
\*\* Please confirm the connection points on the modules.

