

## METAL HALIDE LIGHT ENGINE

- Standard DMX512 signal control or Master/Slave control.
- Four DMX channels, 44 preset programs.
- Digital display.
- Dimmer / STROBE.
- Audio control.
- Twinkle effect.
- UV protected.
- Over-heat protection.
- Ch1: Color, CH2: Speed, CH3: Twinkle, CH4: Dimmer.



Code	Voltage	Lamp	Life of lamp	Max Aperture(mm)	Size(mm)	Weight(mm)
FOE.001 /150DMX	230VAC	CDM-T 150W	6000H	Φ30	L340×W320×H150	11,0

## HALOGEN LIGHT ENGINE

- Standard DMX512 signal control or Master/Slave control.
- Two DMX channels, 44 preset programs.
- Digital display.
- 8Colours
- Audio control.
- UV protected.
- Over-heat protection.
- Ch1: Color, CH2: Speed



Code	Voltage	Lamp	Life of lamp	Max Aperture(mm)	Size(mm)	Weight(mm)
FOE.003 /100DMX	230VAC	12V 50/75/100W Halogen	3000H	Φ22	L246×W205×H125	4,0

## LIGHT ENGINE IP43

- Standard DMX512 signal control or Master/Slave control.
- Two DMX channels, 44 preset programs.
- Digital display.
- 8Colours
- IP rating: IP43
- Stainless steel enclosure.
- UV protected.
- Over-heat protection.
- CH1: Color, CH2: Speed



Code	Voltage	Lamp	Life of lamp	Max Aperture(mm)	Size(mm)	Weight(mm)
FOE.004 /150DMX/IP43	230VAC	CDM-T 150W	6000H	Φ30	L335×W328×H190	10,7

## ACCESSORIES

Code	Description
FOA.101	Fiber Optic Connector
FOA.102	Fiber Optic End Plug
FOA.103	Fiber Optic Channel
FOA.104	Fiber Optic Clip for FOR035 & FOR036
FOA.105	Hot Knife




## DMX LED 40W & 80W LIGHT ENGINES

- Standard aperture:  
- FOE.006 (Φ28mm / Φ24mm / Φ20mm)  
- FOE.010 (Φ28mm / Φ30mm)
- Gross Weight: 5.6Kg



Code	Total Power Consumption	Control Protocol	Colour	Light Source	Luminus Flux	Life of LED	Standard Aperture
FOE.006	50W	DMX or by Remote Control	6 colours	40W CREE LED	3500lm (6000K)	50000H	Φ28mm Φ24mm Φ20mm
FOE.010	90W	DMX or by Remote Control	6 colours	80W CREE LED	6100lm (6000K)	50000H	Φ28mm Φ30mm

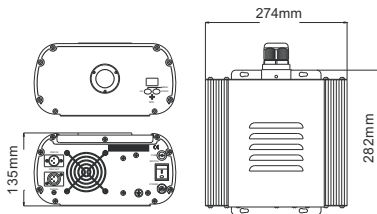


Accessories supplied with the engine



## DMX LED 10W LIGHT ENGINE

Code	Total Power Consumption	Control Protocol	Colour	Light Source	Life of LED	Standard Aperture
FOE.009	15W	DMX or by Remote Control	6 colours	10W LED	30000H	Φ11mm



Accessories supplied with the engine

